


Material: Brass chemical Nickel Plated
Working Temperature: -20 ÷ 80 C°
Working Temperature: -4 ÷ 176 F°
Working Pressure (max): 20 bar
Working Pressure (max): 290 psi
Vacuum: -99 kPa
Vacuum: 29" Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

AP13

Female Straight

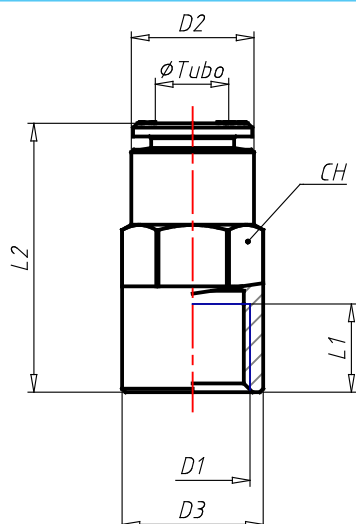

AP13

3D

CODE	TYPE	DTUBO	D1	D2	D2IN	D3	D3IN	L1	L1IN	L2	L2IN	CH	G	G02	WTF	WPP	TVH
AP030011	AP13 04 18	4	G1/8	9.0	.354	13.0	.512	7	.276	23.5	.925	9	9.0	.317	-4 ÷ 176	290	29"
AP030031	AP13 06 18	6	G1/8	11.9	.469	14.0	.551	7	.276	26.5	1.043	12	14.1	.497	-4 ÷ 176	290	29"
AP030032	AP13 06 14	6	G1/4	11.9	.469	16.0	.630	10	.394	30.5	1.201	12	17.2	.607	-4 ÷ 176	290	29"
AP030041	AP13 08 18	8	G1/8	13.7	.539	16.2	.638	7	.276	26.5	1.043	14	16.5	.582	-4 ÷ 176	290	29"
AP030042	AP13 08 14	8	G1/4	13.9	.547	16.0	.630	10	.394	30.5	1.201	14	18.5	.653	-4 ÷ 176	290	29"
AP030052	AP13 10 14	10	G1/4	15.9	.626	18.5	.728	10	.394	32.0	1.260	16	22.0	.776	-4 ÷ 176	290	29"
AP030053	AP13 10 38	10	G3/8	15.9	.626	20.0	.787	11	.433	33.5	1.319	16	27.8	.981	-4 ÷ 176	290	29"