


Material:	Brass Nickel Plated	
Working Temperature:	-20 ÷ 80	C°
Working Temperature:	-4 ÷ 176	F°
Working Pressure (max):	20	bar
Working Pressure (max):	290	psi
Vacuum:	-99	kPa
Vacuum:	29"	Hg
Conformity:	RoHS	

Conformity:	
Conformity:	
Conformity:	
Conformity:	
Application	Pneumatic circuits

AR15

Elbow male fitting, rotating

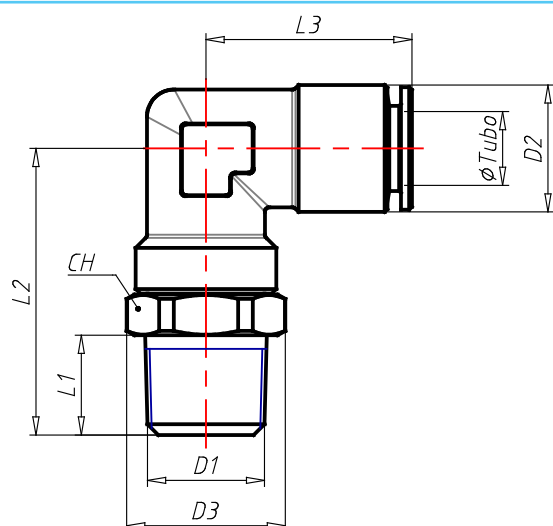

AR15

3D

CODE	TYPE	DTUBO	D1	D2	D2IN	D3	D3IN	L1	L1IN	L2	L2IN	L3	L3IN	CH	G	G02	NG	WTF	WPP	TVH
AR050011	AR15 04 4 18		R1/8	9	.354	14.5	.571	7.5	.295	25.3	.996	19.5	.768	13	21.6	.762	500	-4 ÷ 176	290	29"
AR050031	AR15 06 6 18		R1/8	12	.472	14.5	.571	7.5	.295	25.3	.996	22.0	.866	13	24.5	.864	500	-4 ÷ 176	290	29"
AR050032	AR15 06 6 14		R1/4	12	.472	15.5	.610	11.0	.433	29.3	1.154	22.0	.866	14	27.9	.984	500	-4 ÷ 176	290	29"
AR050041	AR15 08 8 18		R1/8	14	.551	17.5	.689	7.5	.295	28.1	1.106	22.5	.886	16	40.1	1.414	400	-4 ÷ 176	290	29"
AR050042	AR15 08 8 14		R1/4	14	.551	17.5	.689	11.0	.433	31.6	1.244	22.5	.886	16	41.8	1.474	400	-4 ÷ 176	290	29"
AR050043	AR15 08 8 38		R3/8	14	.551	20.0	.787	11.5	.453	32.6	1.283	22.5	.886	18	47.5	1.676	400	-4 ÷ 176	290	29"
AR050052	AR15 10 10 14		R1/4	17	.669	24.0	.945	11.0	.433	37.1	1.461	26.5	1.043	22	85.5	3.016	300	-4 ÷ 176	290	29"

AR050053	AR15	10	38	10	R3/8	17	.669	24.0	.945	11.5	.453	37.6	1.480	26.5	1.043	22	89.0	3.139	300	-4 ÷ 176	290	29"
AR050054	AR15	10	12	10	R1/2	17	.669	24.5	.965	14.0	.551	40.1	1.579	26.5	1.043	22	94.1	3.319	300	-4 ÷ 176	290	29"
AR050063	AR15	12	38	12	R3/8	19	.748	24.0	.945	11.5	.453	38.6	1.520	28.5	1.122	22	90.3	3.185	250	-4 ÷ 176	290	29"
AR050064	AR15	12	12	12	R1/2	19	.748	24.5	.965	14.0	.551	41.1	1.618	28.5	1.122	22	96.1	3.390	250	-4 ÷ 176	290	29"