


Material: Brass chemical Nickel Plated
Working Temperature: -20 ÷ 150 C°
Working Temperature: -4 ÷ 302 F°
Working Pressure (max): 20 bar
Working Pressure (max): 290 psi
Vacuum: -99 kPa
Vacuum: 29" Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

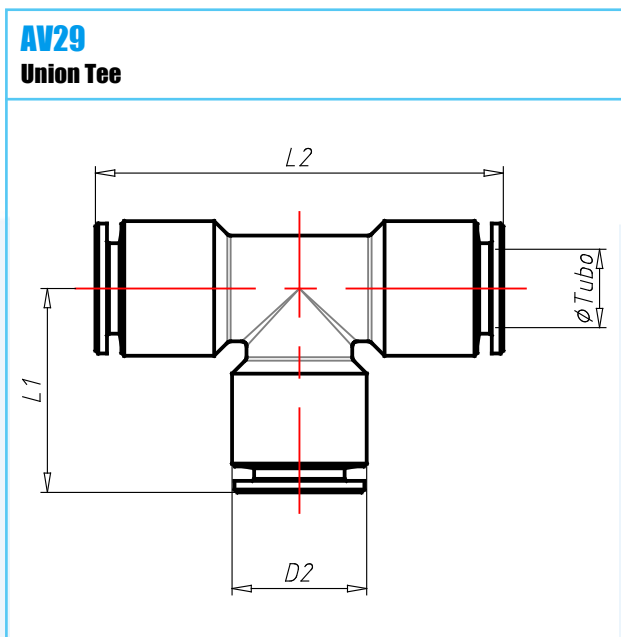

CODE	TYPE	DTUBO	D2	D2IN	L1	L1IN	L2	L2IN	G	GOZ	WTF	WPP	TVH
AV190010	AV29 04 04	4	9	.354	17.5	.689	35	1.378	11.0	.388	-4 + 302	290	29"
AV190030	AV29 06 06	6	12	.472	20.0	.787	40	1.575	22.0	.776	-4 + 302	290	29"
AV190040	AV29 08 08	8	14	.551	21.0	.827	42	1.654	28.0	.988	-4 + 302	290	29"
AV190050	AV29 10 10	10	16	.630	24.5	.965	49	1.929	37.5	1.323	-4 + 302	290	29"
AV190060	AV29 12 12	12	19	.748	26.0	1.024	52	2.047	53.0	1.870	-4 + 302	290	29"