


**Material:** Brass Nickel Plated  
**Working Temperature:** -20 ÷ 80 C°  
**Working Temperature:** -4 ÷ 176 F°  
**Working Pressure (max):** 15 bar  
**Working Pressure (max):** 218 psi  
**Vacuum:** kPa  
**Vacuum:** Hg  
**Conformity:**

**Conformity:** RoHS  
**Conformity:**  
**Conformity:**  
**Conformity:**  
**Application** Pneumatic circuits

## GU26-12

### Female Coupling

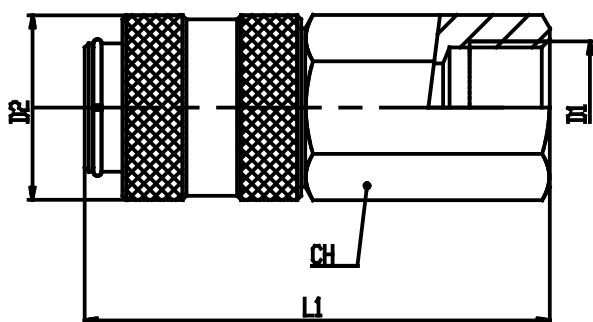

## GU26-12

## 3D

| CODE    | TYPE          | D1   | D2 | D2IN | L1   | L1IN  | CH | G     | OZ    | DN  | WTF      | WPP |
|---------|---------------|------|----|------|------|-------|----|-------|-------|-----|----------|-----|
| 7260202 | GU26-12 00 14 | G1/4 | 23 | .906 | 56.5 | 2.224 | 20 | 91.0  | 3.210 | 7.4 | -4 ÷ 176 | 218 |
| 7260203 | GU26-12 00 38 | G3/8 | 23 | .906 | 58.0 | 2.283 | 20 | 90.5  | 3.192 | 7.4 | -4 ÷ 176 | 218 |
| 7260204 | GU26-12 00 12 | G1/2 | 23 | .906 | 59.5 | 2.343 | 24 | 105.0 | 3.704 | 7.4 | -4 ÷ 176 | 218 |