


Material: Brass Nickel Plated
Working Temperature: -20 ÷ 80 °C°
Working Temperature: -4 ÷ 176 °F°
Working Pressure (max): 20 bar
Working Pressure (max): 290 psi
Vacuum: -99 kPa
Vacuum: 29" Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

MA13

Female Straight

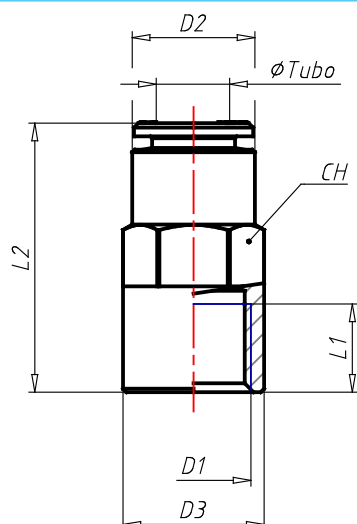

MA13

3D

CODE	TYPE	DTUBO	D1	D2	D2IN	D3	D3IN	L1	L1IN	L2	L2IN	CH	G	G0Z	WTF	WPP	TVH
A0030011	MA13 04 18	4	G1/8	9.0	.354	13.0	.512	7	.276	23.5	.925	9	10.0	.353	-4 ÷ 176	290	29"
A0030031	MA13 06 18	6	G1/8	11.9	.469	14.0	.551	7	.276	26.0	1.024	12	15.1	.533	-4 ÷ 176	290	29"
A0030032	MA13 06 14	6	G1/4	11.9	.469	16.0	.630	10	.394	30.0	1.181	12	18.5	.653	-4 ÷ 176	290	29"
A0030041	MA13 08 18	8	G1/8	13.7	.539	16.2	.638	7	.276	26.0	1.024	14	17.5	.617	-4 ÷ 176	290	29"
A0030042	MA13 08 14	8	G1/4	13.9	.547	16.0	.630	10	.394	30.0	1.181	14	20.2	.713	-4 ÷ 176	290	29"
A0030043	MA13 08 38	8	G3/8	13.9	.547	20.0	.787	11	.433	31.0	1.220	14	25.9	.914	-4 ÷ 176	290	29"
A0030052	MA13 10 14	10	G1/4	15.9	.626	18.5	.728	10	.394	32.0	1.260	16	24.4	.861	-4 ÷ 176	290	29"
A0030053	MA13 10 38	10	G3/8	15.9	.626	20.0	.787	11	.433	33.5	1.319	16	30.3	1.069	-4 ÷ 176	290	29"
A0030054	MA13 10 12	10	G1/2	15.9	.626	25.0	.984	11	.433	36.5	1.437	16	45.0	1.587	-4 ÷ 176	290	29"
A0030063	MA13 12 38	12	G3/8	19.0	.748	23.1	.909	11	.433	34.0	1.339	20	38.3	1.351	-4 ÷ 176	290	29"
A0030064	MA13 12 12	12	G1/2	18.8	.740	25.0	.984	11	.433	37.0	1.457	19	50.9	1.795	-4 ÷ 176	290	29"