


Material: Brass Nickel Plated
Working Temperature: -20 ÷ 80 °C°
Working Temperature: -4 ÷ 176 °F°
Working Pressure (max): 20 bar
Working Pressure (max): 290 psi
Vacuum: -99 kPa
Vacuum: 29" Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

MA21

Swivelling Tee fitting, parallel

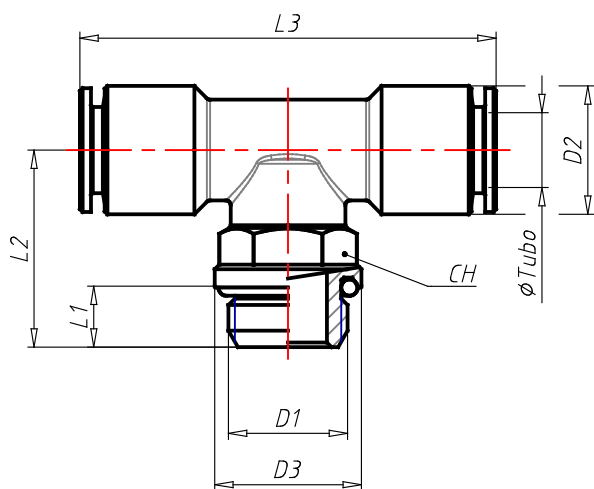

MA21

3D

CODE	TYPE	DTUBO	D1	D2	D2IN	D3	D3IN	L1	L1IN	L2	L2IN	L3	L3IN	CH	G	G02	WTF	WPP	TVH
A0110011	MA21 04 18	4	G1/8	9.1	.358	14.5	.571	5.0	.197	18.2	.717	39	1.535	13	20.2	.713	-4 ÷ 176	290	29"
A0110012	MA21 04 14	4	G1/4	9.1	.358	16.0	.630	6.5	.256	21.7	.854	39	1.535	13	23.9	.843	-4 ÷ 176	290	29"
A0110031	MA21 06 18	6	G1/8	12.0	.472	14.5	.571	5.0	.197	18.0	.709	44	1.732	13	25.2	.889	-4 ÷ 176	290	29"
A0110032	MA21 06 14	6	G1/4	12.0	.472	16.0	.630	6.5	.256	21.5	.846	44	1.732	13	29.1	1.026	-4 ÷ 176	290	29"
A0110041	MA21 08 18	8	G1/8	14.0	.551	14.5	.571	5.0	.197	18.0	.709	45	1.772	13	30.7	1.083	-4 ÷ 176	290	29"
A0110042	MA21 08 14	8	G1/4	14.0	.551	16.0	.630	6.5	.256	21.5	.846	45	1.772	13	34.1	1.203	-4 ÷ 176	290	29"
A0110043	MA21 08 38	8	G3/8	14.0	.551	20.0	.787	7.0	.276	25.5	1.004	46	1.811	16	46.4	1.637	-4 ÷ 176	290	29"
A0110052	MA21 10 14	10	G1/4	16.0	.630	18.0	.709	6.5	.256	22.0	.866	52	2.047	16	44.4	1.566	-4 ÷ 176	290	29"
A0110053	MA21 10 38	10	G3/8	16.0	.630	20.0	.787	7.0	.276	25.5	1.004	52	2.047	16	49.7	1.753	-4 ÷ 176	290	29"
A0110063	MA21 12 38	12	G3/8	19.0	.748	22.5	.886	7.0	.276	26.0	1.024	57	2.244	20	75.3	2.656	-4 ÷ 176	290	29"
A0110064	MA21 12 12	12	G1/2	19.0	.748	25.0	.984	8.5	.335	30.5	1.201	57	2.244	20	82.0	2.892	-4 ÷ 176	290	29"