


Material:	Brass Nickel Plated	
Working Temperature:	-20 ÷ 80	C°
Working Temperature:	-4 ÷ 176	F°
Working Pressure (max):	20	bar
Working Pressure (max):	290	psi
Vacuum:	-99	kPa
Vacuum:	29"	Hg
Conformity:	Silicone Free	

Conformity:	RoHS
Conformity:	
Conformity:	
Conformity:	
Application	Pneumatic circuits

MA24

Lateral Swivelling Tee fitting, parallel

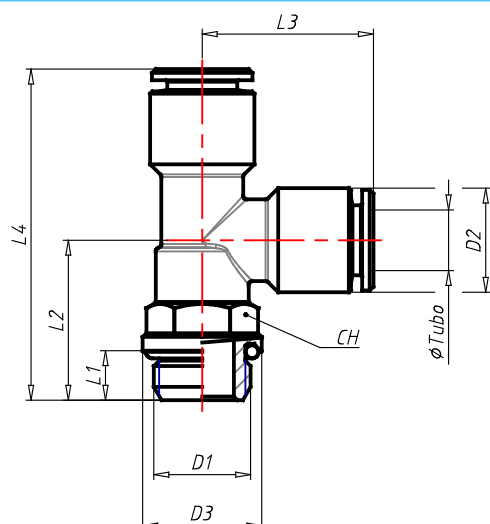

MA24

3D

CODE	TYPE	DTUBO	D1	D2	D2IN	D3	D3IN	L1	L1IN	L2	L2IN	L3	L3IN	L4	L4IN	CH	G	GOZ	WTF	WPP	TVH
A0140011	MA24	4	G1/8	9.1	.358	14.5	.571	5.0	.197	18.2	.717	19.5	.768	37.7	1.484	13	20.5	.723	-4 ÷ 176	290	29"
A0140012	MA24	4	G1/4	9.1	.358	16.0	.630	6.5	.256	21.7	.854	19.5	.768	41.2	1.622	13	24.0	.847	-4 ÷ 176	290	29"
A0140031	MA24	6	G1/8	12.0	.472	14.5	.571	5.0	.197	18.2	.717	22.0	.866	40.2	1.583	13	26.0	.917	-4 ÷ 176	290	29"
A0140032	MA24	6	G1/4	12.0	.472	16.0	.630	6.5	.256	21.7	.854	22.0	.866	43.7	1.720	13	29.5	1.041	-4 ÷ 176	290	29"
A0140041	MA24	8	G1/8	14.0	.551	14.5	.571	5.0	.197	18.0	.709	22.5	.886	40.5	1.594	13	30.0	1.058	-4 ÷ 176	290	29"
A0140042	MA24	8	G1/4	14.0	.551	16.0	.630	6.5	.256	21.5	.846	22.5	.886	44.0	1.732	13	33.5	1.182	-4 ÷ 176	290	29"
A0140052	MA24	10	G1/4	16.0	.630	18.0	.709	6.5	.256	22.0	.866	26.0	1.024	48.0	1.890	16	44.0	1.552	-4 ÷ 176	290	29"

A0140053	MA24 10 38	10	G3/8	16.0	.630	20.0	.787	7.0	.276	25.5	1.004	26.0	1.024	51.5	2.028	16	49.0	1.728	-4 ÷ 176	290	29"
A0140063	MA24 12 38	12	G3/8	19.0	.748	22.5	.886	7.0	.276	26.0	1.024	28.5	1.122	54.5	2.146	20	73.0	2.575	-4 ÷ 176	290	29"
A0140064	MA24 12 12	12	G1/2	19.0	.748	25.0	.984	8.5	.335	30.5	1.201	28.5	1.122	59.0	2.323	20	77.0	2.716	-4 ÷ 176	290	29"