


Material: Brass Nickel Plated
Working Temperature: -20 ÷ 80 °C°
Working Temperature: -4 ÷ 176 °F°
Working Pressure (max): 20 bar
Working Pressure (max): 290 psi
Vacuum: -99 kPa
Vacuum: 29" Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

MA43 Plug-in Elbow

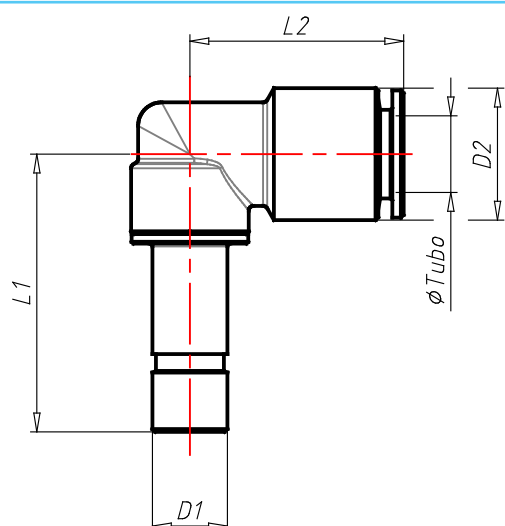

MA43

3D

CODE	TYPE	DTUBO	D1	D2	D2IN	L1	L1IN	L2	L2IN	G	G0Z	WTF	WPP	TVH
A0331010	MA43 04 04	4	4	9.1	.358	25.7	1.012	19.5	.768	14.0	.494	-4 ÷ 176	290	29"
A0331030	MA43 04 06	4	6	9.1	.358	29.7	1.169	19.5	.768	15.0	.529	-4 ÷ 176	290	29"
A0333010	MA43 06 04	6	4	12.0	.472	25.7	1.012	22.0	.866	17.0	.600	-4 ÷ 176	290	29"
A0333030	MA43 06 06	6	6	12.0	.472	29.7	1.169	22.0	.866	17.0	.600	-4 ÷ 176	290	29"
A0333040	MA43 06 08	6	8	12.0	.472	29.7	1.169	22.0	.866	17.5	.617	-4 ÷ 176	290	29"
A0334030	MA43 08 06	8	6	14.0	.551	29.5	1.161	22.5	.886	20.5	.723	-4 ÷ 176	290	29"
A0334040	MA43 08 08	8	8	14.0	.551	29.5	1.161	22.5	.886	20.5	.723	-4 ÷ 176	290	29"
A0335050	MA43 10 10	10	10	16.0	.630	33.5	1.319	26.0	1.024	30.0	1.058	-4 ÷ 176	290	29"