
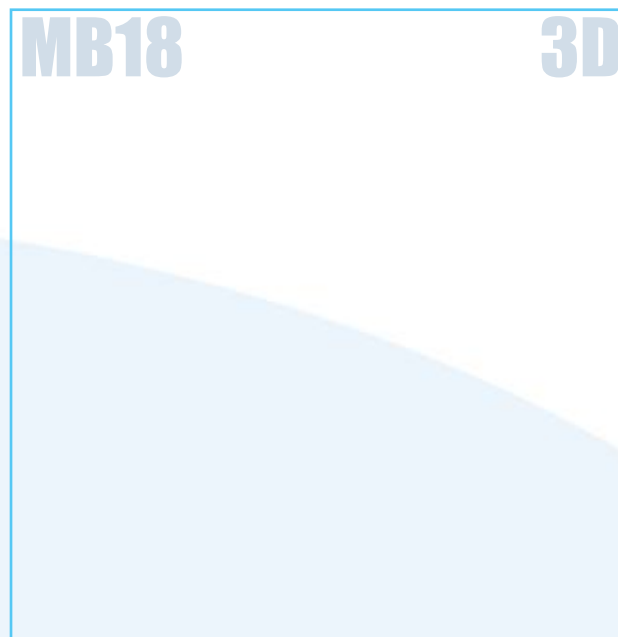


**Material:** Acetal Resin  
**Working Temperature:** -20 ÷ 70 C°  
**Working Temperature:** -4 ÷ 158 F°  
**Working Pressure (max):** 18 bar  
**Working Pressure (max):** 261 psi  
**Vacuum:** -99 kPa  
**Vacuum:** Hg  
**Conformity:** Silicone Free

**Conformity:** RoHS  
**Conformity:**  
**Conformity:**  
**Conformity:**  
**Application** Pneumatic circuits

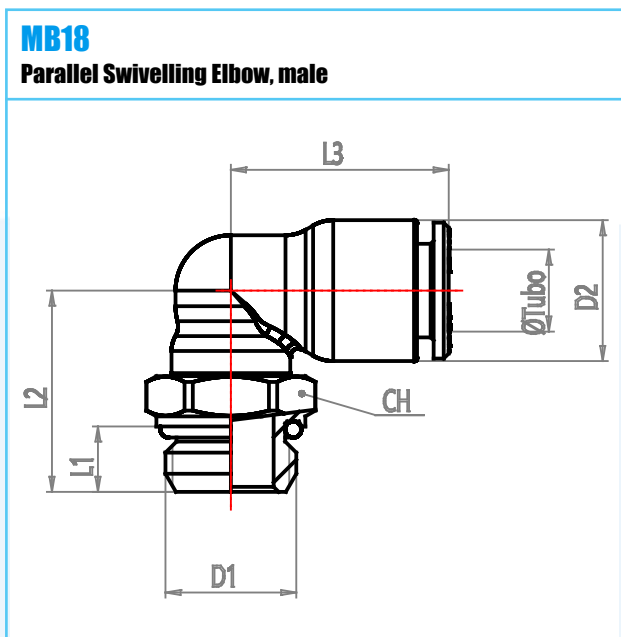

CODE	TYPE	DTUBO	D1	D2	D2IN	L1	L1IN	L2	L2IN	L3	L3IN	CH	G	OZ	WTF	WPP
B0080010	MB18 04 M5	4	M5x0,8	9,5	.374	4	.157	14,8	.583	16	.630	9	4,6	.162	-4 ÷ 158	261
B0080011	MB18 04 18	4	G1/8	9,5	.374	5	.197	15	.591	16	.630	13	7,1	.250	-4 ÷ 158	261
B0080012	MB18 04 14	4	G1/4	9,5	.374	6,5	.256	17	.669	16	.630	16	11,1	.392	-4 ÷ 158	261
B0080030	MB18 06 M5	6	M5x0,8	11,5	.453	4	.157	15,3	.602	20,5	.807	12	7,9	.279	-4 ÷ 158	261
B0080031	MB18 06 18	6	G1/8	11,5	.453	5	.197	17,3	.681	20,5	.807	12	8,4	.296	-4 ÷ 158	261
B0080032	MB18 06 14	6	G1/4	11,5	.453	6,5	.256	19,3	.760	20,5	.787	15	12,5	.441	-4 ÷ 158	261
B0080041	MB18 08 18	8	G1/8	14	.551	5	.197	18	.709	21,5	.846	12	8,8	.310	-4 ÷ 158	261
B0080042	MB18 08 14	8	G1/4	14	.551	6,5	.256	20	.787	21,5	.846	15	12	.423	-4 ÷ 158	261
B0080043	MB18 08 38	8	G3/8	14	.551	7	.276	21,5	.846	21,5	.846	20	21,4	.755	-4 ÷ 158	261
B0080052	MB18 10 14	10	G1/4	16	.630	6,5	.256	21,5	.846	24,5	.965	16	15,6	.550	-4 ÷ 158	261
B0080053	MB18 10 38	10	G3/8	16	.630	6,5	.256	23,5	.925	24,5	.965	20	22,8	.804	-4 ÷ 158	261
B0080063	MB18 12 38	12	G3/8	19	.748	7	.276	24	.945	28,5	1.122	20	26,2	.924	-4 ÷ 158	261
B0080064	MB18 12 12	12	G1/2	19	.748	8,5	.335	28,5	1.122	28,5	1.122	20	33,8	1.192	-4 ÷ 158	261

B0080073	MB18 14 38	14	G3/8	22,5	.886	7	.276	25	.984	32,3	1.272	20	28,8	1.016	-4 ÷ 158	261
B0080074	MB18 14 12	14	G1/2	22,5	.886	8,5	.335	29,5	1.161	32,3	1.272	20	36,5	1.287	-4 ÷ 158	261