


Material: Acetal Resin
Working Temperature: -20 ÷ 70 C°
Working Temperature: -4 ÷ 158 F°
Working Pressure (max): 18 bar
Working Pressure (max): 261 psi
Vacuum: -99 kPa
Vacuum: Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

MB22

Swivelling Tee fitting, parallel

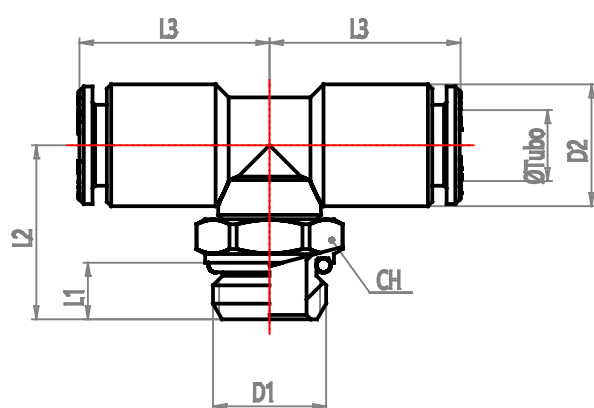

MB22

3D

CODE	TYPE	TUBE OD	D1	D2	D2IN	L1	L1IN	L2	L2IN	L3	L3IN	CH	G	OZ	WTF	WPP
B0120010	MB22 04 M5	4	M5x0,8	10	.394	4.0	.157	14.8	.583	15.7	.618	9	5.6	.198	-4 ÷ 158	261
B0120011	MB22 04 18	4	G1/8	10	.394	5.0	.197	15.0	.591	15.7	.618	13	8.1	.286	-4 ÷ 158	261
B0120012	MB22 04 14	4	G1/4	10	.394	6.5	.256	17.0	.669	15.7	.618	16	12.0	.423	-4 ÷ 158	261
B0120030	MB22 06 M5	6	M5x0,8	12	.472	4.0	.157	15.3	.602	20.2	.795	12	9.2	.325	-4 ÷ 158	261
B0120031	MB22 06 18	6	G1/8	12	.472	5.0	.197	17.3	.681	20.2	.795	12	9.8	.346	-4 ÷ 158	261
B0120032	MB22 06 14	6	G1/4	12	.472	6.5	.256	19.3	.760	20.2	.795	15	13.6	.480	-4 ÷ 158	261
B0120041	MB22 08 18	8	G1/8	14	.551	5.0	.197	18.0	.709	21.7	.854	12	11.1	.392	-4 ÷ 158	261
B0120042	MB22 08 14	8	G1/4	14	.551	6.5	.256	20.0	.787	21.7	.854	15	15.1	.533	-4 ÷ 158	261
B0120043	MB22 08 38	8	G3/8	14	.551	7.0	.276	21.5	.846	21.7	.854	20	23.7	.836	-4 ÷ 158	261
B0120052	MB22 10 14	10	G1/4	16	.630	6.5	.256	21.5	.846	24.0	.945	16	18.0	.635	-4 ÷ 158	261
B0120053	MB22 10 38	10	G3/8	16	.630	7.0	.276	23.5	.925	24.0	.945	20	25.2	.889	-4 ÷ 158	261
B0120063	MB22 12 38	12	G3/8	19	.748	7.0	.276	24.0	.945	28.5	1.122	20	30.5	1.076	-4 ÷ 158	261
B0120064	MB22 12 12	12	G1/2	19	.748	8.5	.335	28.5	1.122	28.5	1.122	20	38.1	1.344	-4 ÷ 158	261