


Material: Acetal Resin
Working Temperature: -20 ÷ 70 °C°
Working Temperature: -4 ÷ 158 °F°
Working Pressure (max): 18 bar
Working Pressure (max): 261 psi
Vacuum: -99 kPa
Vacuum: Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

MB48 Elbow Bulkhead

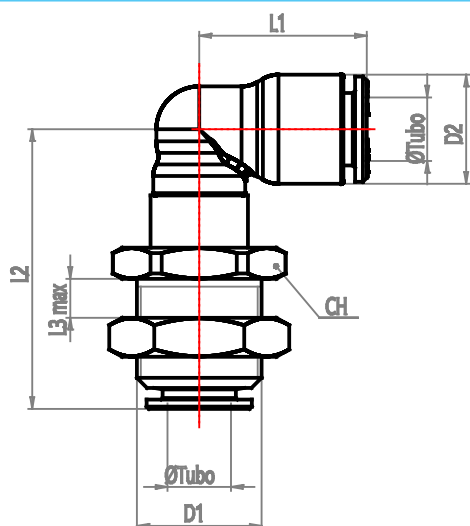

MB48

3D

CODE	TYPE	DTUBO	D1	D2	D2IN	L1	L1IN	L2	L2IN	L3	L3IN	CH	G	OZ	WTF	WPP
B0380010	MB48 04 04	4	M12x0,75	9,5	.374	16	.630	27,1	1.067	5,5	.217	15	18	.635	-4 ÷ 158	261
B0380030	MB48 06 06	6	M14x1	11,5	.453	20,5	.807	33	1.299	5,7	.224	18	32,8	1.157	-4 ÷ 158	261
B0380040	MB48 08 08	8	M16x1	14	.551	21,5	.846	35,7	1.406	7,7	.303	20	39,6	1.397	-4 ÷ 158	261
B0380050	MB48 10 10	10	M18x1	16	.630	24,5	.964	40,3	1.587	9,2	.362	22	52,8	1.862	-4 ÷ 158	261
B0380060	MB48 12 12	12	M20x1	19	.748	28,5	1.122	44,5	1.752	9,8	.386	24	71,5	2.522	-4 ÷ 158	261