
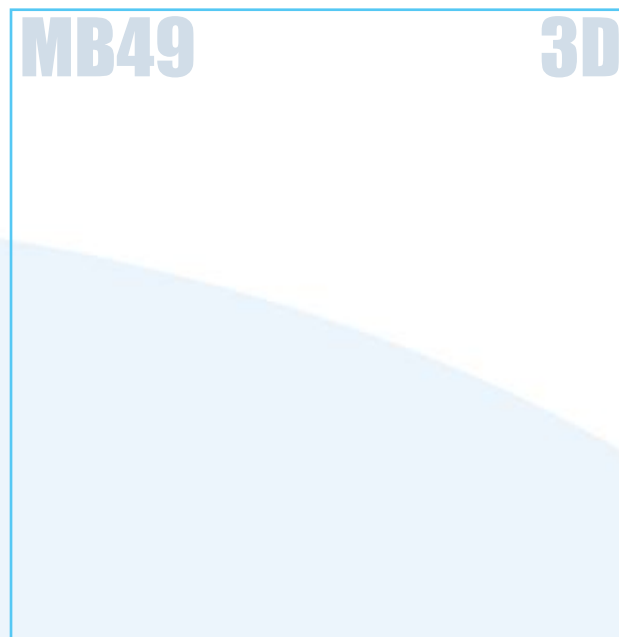


Material: Acetal Resin
Working Temperature: -20 ÷ 70 C°
Working Temperature: -4 ÷ 158 F°
Working Pressure (max): 18 bar
Working Pressure (max): 261 psi
Vacuum: -99 kPa
Vacuum: Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

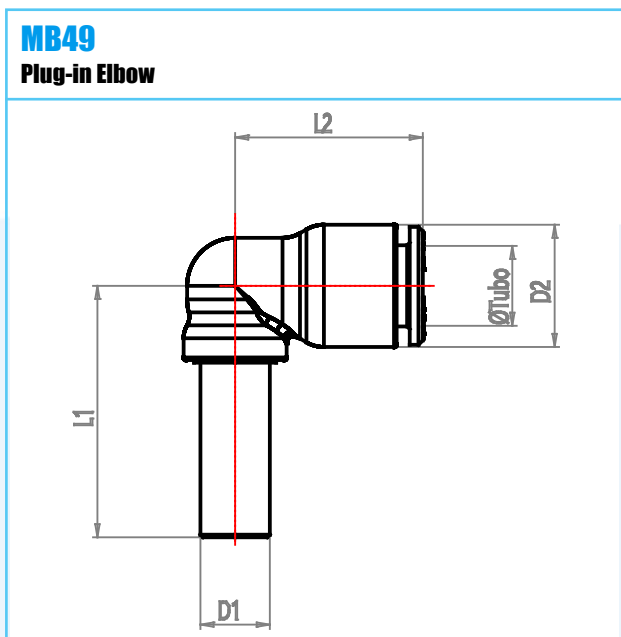

CODE	TYPE	DTUBO	D1	D1IN	D2	D2IN	L1	L1IN	L2	L2IN	G	OZ	WTF	WPP
B0390010	MB49 04 04	4	4	.157	9,5	.374	21	.827	16	.630	1,75	.062	-4 ÷ 158	261
B0390030	MB49 06 06	6	6	.236	11,5	.453	25,8	1.016	20,5	.807	2,716	.096	-4 ÷ 158	261
B0390040	MB49 08 08	8	8	.315	14	.551	28,8	1.134	21,5	.846	3,463	.122	-4 ÷ 158	261
B0390050	MB49 10 10	10	10	.394	16	.630	32,5	1.279	24,5	.964	6,73	.237	-4 ÷ 158	261
B0390060	MB49 12 12	12	12	.472	19	.748	33	1.299	28,5	1.122	9,51	.335	-4 ÷ 158	261
B0390070	MB49 14 14	14	14	.551	22,5	.886	37	1.456	32,3	1.272	11,51	.406	-4 ÷ 158	261