


Material: Brass Nickel Plated
Working Temperature: -40 ÷ 150 C°
Working Temperature: -40 ÷ 302 F°
Working Pressure (max): 25 bar
Working Pressure (max): 363 psi
Vacuum: -99 kPa
Vacuum: Hg
Conformity:

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

MC11

Taper Straight, male

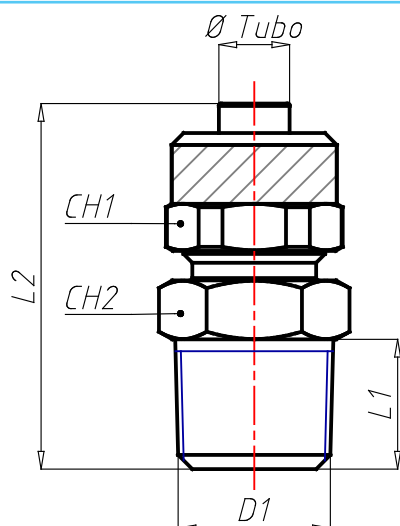

MC11

3D

NAME	CODE	TYPE	VAR_E_TUBO	VAR_I_TUBO	D1	L1	L1IN	L2	L2IN	CH1	CH2	G	OZ	WTF	WPP	NN
02010011	02010011	MC11 04 18 4		2,5	R1/8	7,5	.295	23,5	.925	7	11	7,4	.261	-40 ÷ 302	363	0
02010031	02010031	MC11 06 18 6		4	R1/8	8	.315	27,5	1.083	12	12	15	.529	-40 ÷ 302	363	0
02010032	02010032	MC11 06 14 6		4	R1/4	11	.433	31	1.220	12	14	20,6	.727	-40 ÷ 302	363	0
02010033	02010033	MC11 06 38 6		4	R3/8	11,5	.453	31,5	1.240	12	17	23,9	.843	-40 ÷ 302	363	0
02010041	02010041	MC11 08 18 8		6	R1/8	8	.315	27,5	1.083	14	12	17,7	.624	-40 ÷ 302	363	0
02010042	02010042	MC11 08 14 8		6	R1/4	11	.433	31	1.220	14	14	22,5	.794	-40 ÷ 302	363	0
02010043	02010043	MC11 08 38 8		6	R3/8	11,5	.453	31,5	1.240	14	17	27,4	.967	-40 ÷ 302	363	0

02010051	02010051	MC11 10 18	10	8	R1/8	8	.315	29,5	1.161	16	14	22	.776	-40 ÷ 302	363	0
02010052	02010052	MC11 10 14	10	8	R1/4	11	.433	32,5	1.280	16	14	26,6	.938	-40 ÷ 302	363	0
02010053	02010053	MC11 10 38	10	8	R3/8	11,5	.453	33	1.299	16	17	33,1	1.168	-40 ÷ 302	363	0
02010054	02010054	MC11 10 12	10	8	R1/2	14	.551	36	1.417	16	22	48,3	1.704	-40 ÷ 302	363	0
02010063	02010063	MC11 12 38	12	10	R3/8	11,5	.453	34,5	1.358	18	17	37,3	1.316	-40 ÷ 302	363	0
02010064	02010064	MC11 12 12	12	10	R1/2	14	.551	37,5	1.476	18	22	49,5	1.746	-40 ÷ 302	363	0
02010084	02010084	MC11 15 12	15	12,5	R1/2	14	.551	39,5	1.555	22	22	61,9	2.183	-40 ÷ 302	363	0
02019021	02019021	MC11 05 18	5	3	R1/8	8	.315	25	.984	8	12	8,6	.303	-40 ÷ 302	363	0