


Material: Brass Nickel Plated
Working Temperature: -20 ÷ 80 C°
Working Temperature: -4 ÷ 176 F°
Working Pressure (max): 18 bar
Working Pressure (max): 261 psi
Vacuum: -99 kPa
Vacuum: Hg
Conformity:

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

MC29

Swivelling taper straight

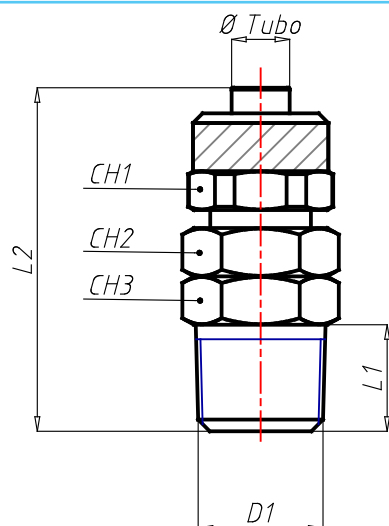

MC29

3D

NAME	CODE	TYPE	VAR_E_TUBO	VAR_TUBO	D1	L1	L1IN	L2	L2IN	CH1	CH2	CH3	G	OZ	WTF	WPP	NN
02190031	02190031	MC29 06 18 6	6	4	R1/8	8	.315	37	1.457	12	12	12	16,3	.575	-4 ÷ 176	261	0
02190032	02190032	MC29 06 14 6	6	4	R1/4	11	.433	40	1.575	12	14	14	27,2	.959	-4 ÷ 176	261	0
02190041	02190041	MC29 08 18 8	8	6	R1/8	8	.315	37	1.457	14	12	12	20,4	.720	-4 ÷ 176	261	0
02190042	02190042	MC29 08 14 8	8	6	R1/4	11	.433	40	1.575	14	14	14	30,6	1.079	-4 ÷ 176	261	0
02190052	02190052	MC29 10 14 10	10	8	R1/4	11	.433	42	1.654	16	14	14	32,1	1.132	-4 ÷ 176	261	0