


Material: Brass Nickel Plated
Working Temperature: -20 ÷ 80 C°
Working Temperature: -4 ÷ 176 F°
Working Pressure (max): 18 bar
Working Pressure (max): 261 psi
Vacuum: -99 kPa
Vacuum: Hg
Conformity:

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

MC30

Swivelling Fitting with Banjo Ring

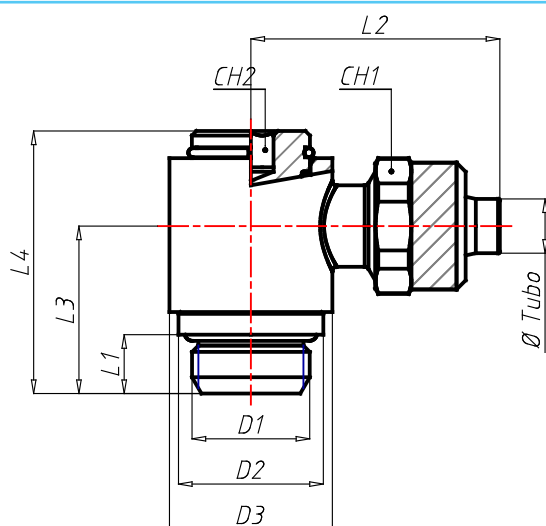

MC30

3D

NAME	CODE	TYPE	VAR	VAR	D1	D2	D2IN	D3	D3IN	L1	L1IN	L2	L2IN	L3	L3IN	L4	L4IN	CH1	CH2	G	OZ	WTF	WPP	NN
			E	TU	I	TU																		
			BO	BO																				
022	022	MC3	6	4	G1/8	13	.512	14	.551	5	.197	25	.984	16,5	.650	25,5	1.00	12	4	28,2	.995	-4 ÷	261	0
000	000	0 06															4					176		
31	31	18																						
022	022	MC3	6	4	G1/4	16	.630	18	.709	6,5	.256	26,5	1.04	18,5	.728	29	1.14	12	5	41,9	1.47	-4 ÷	261	0
000	000	0 06											3				2				8	176		
32	32	14																						
022	022	MC3	8	6	G1/8	13	.512	14	.551	5	.197	25	.984	16,5	.650	25,5	1.00	14	4	28,7	1.01	-4 ÷	261	0
000	000	0 08															4				2	176		
41	41	18																						
022	022	MC3	8	6	G1/4	16	.630	18	.709	6,5	.256	27,5	1.08	18,5	.728	29	1.14	14	5	44,1	1.55	-4 ÷	261	0
000	000	0 08											3				2				6	176		
42	42	14																						

02200052	02200052	MC30	10	8	G1/4	16	.630	18	.709	6,5	.256	28,5	1.122	18,5	.728	29	1.142	16	5	46,7	1.647	-4 ÷	261	0
		10 14																				176		
02200053	02200053	MC30	10	8	G3/8	20	.787	22	.866	7	.276	30,5	1.201	22	.866	32,5	1.280	16	6	68,7	2.423	-4 ÷	261	0
		10 38																				176		