


Material: Brass Nickel Plated
Working Temperature: -40 ÷ 150 C°
Working Temperature: -40 ÷ 302 F°
Working Pressure (max): 60 bar
Working Pressure (max): 363 psi
Vacuum: kPa
Vacuum: Hg
Conformity:

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic, hydraulic and oleodynamic circuits

MO11

Taper Straight, male

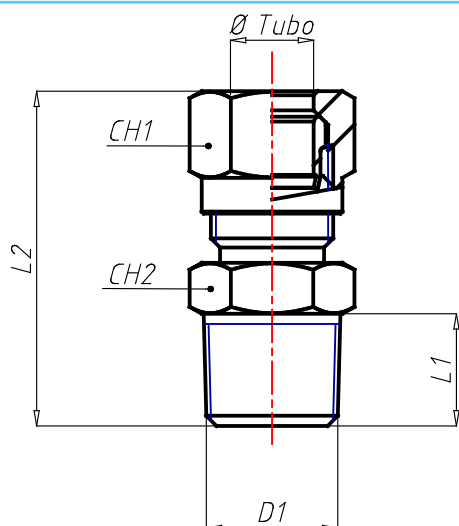

MO11

3D

NAME	CODE	TYPE	DTUBO	D1	L1	L1IN	L2	L2IN	CH1	CH2	G	OZ	WTF	WPP	NN
03010021	03010021	MO11 05 18	5	R1/8	8	.315	28	1.102	12	11	16,5	.582	-40 ÷ 302	363	0
03010031	03010031	MO11 06 18	6	R1/8	8	.315	28	1.102	12	12	16	.564	-40 ÷ 302	363	0
03010041	03010041	MO11 08 18	8	R1/8	8	.315	29,5	1.161	14	12	19	.670	-40 ÷ 302	363	0
03010032	03010032	MO11 06 14	6	R1/4	11	.433	32,5	1.280	12	14	20,5	.723	-40 ÷ 302	363	0
03010042	03010042	MO11 08 14	8	R1/4	11	.433	33	1.299	14	14	22,5	.794	-40 ÷ 302	363	0
03010052	03010052	MO11 10 14	10	R1/4	11	.433	37,5	1.476	19	17	43,5	1.534	-40 ÷ 302	363	0
03010043	03010043	MO11 08 38	8	R3/8	11,5	.453	33	1.299	14	17	40	1.411	-40 ÷ 302	363	0
03010053	03010053	MO11 10 38	10	R3/8	11,5	.453	38	1.496	19	17	56	1.975	-40 ÷ 302	363	0
03010063	03010063	MO11 12 38	12	R3/8	11,5	.453	39	1.535	22	19	60	2.116	-40 ÷ 302	363	0
03010064	03010064	MO11 12 12	12	R1/2	14	.551	41	1.614	22	22	77	2.716	-40 ÷ 302	363	0
03010084	03010084	MO11 15 12	15	R1/2	14	.551	42,5	1.673	27	22	104	3.668	-40 ÷ 302	363	0
03010011	03010011	MO11 04 18	4	R1/8	8	.315	27	1.063	10	10	12	.423	-40 ÷ 302	363	0