


Material: Brass
Working Temperature: -10 ÷ 70 °C°
Working Temperature: 14 ÷ 158 °F°
Working Pressure (max): 0 ÷ 12 bar
Working Pressure (max): 174 psi
Vacuum: kPa
Vacuum: Hg
Conformity:

Conformity:
Conformity:
Conformity:
Conformity:
Application Pneumatic installations fed with filtered, lubricated air

MV11-BE

Sintered bronze air muffler

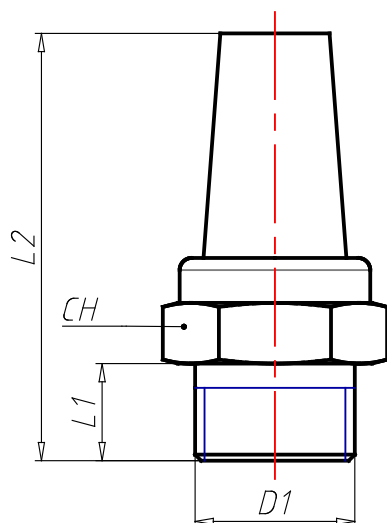

MV11-BE

3D

CODE	TYPE	D1	L1	L1IN	L2	L2IN	CH	G	G02	NL	FT	WTF	WPP	CONF
04010000-BE	MV11 00 M5-BE	M5x0,8	4.0	.157	16.0	.630	8	2.0	.071	-	35	14 ÷ 158	174	RoHS
04010001-BE	MV11 00 18-BE	G1/8	6.0	.236	28.0	1.102	13	8.8	.310	75	35	14 ÷ 158	174	RoHS
04010002-BE	MV11 00 14-BE	G1/4	8.0	.315	32.0	1.260	16	15.2	.536	81	35	14 ÷ 158	174	RoHS
04010003-BE	MV11 00 38-BE	G3/8	7.5	.295	41.0	1.614	19	25.7	.907	82	35	14 ÷ 158	174	RoHS
04010004-BE	MV11 00 12-BE	G1/2	10.0	.394	46.5	1.831	24	47.0	1.658	85	35	14 ÷ 158	174	RoHS