
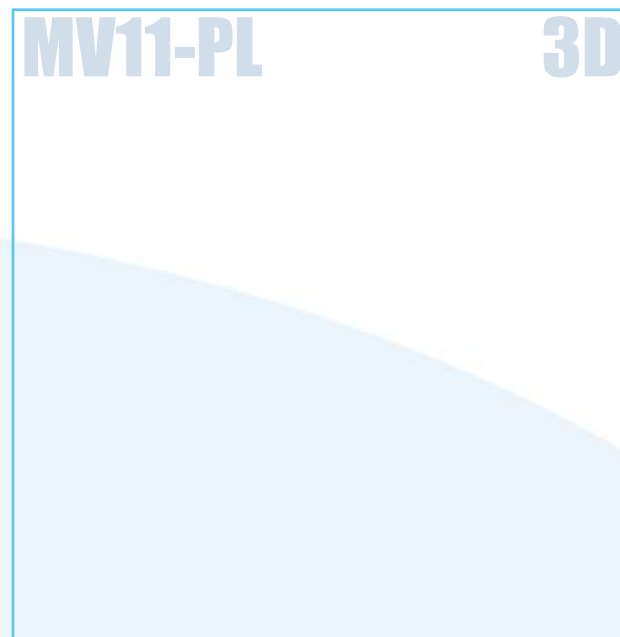


**Material:** POM  
**Working Temperature:** -10 ÷ 70 C°  
**Working Temperature:** 14 ÷ 158 F°  
**Working Pressure (max):** 0 ÷ 6 bar  
**Working Pressure (max):** 0 ÷ 87 psi  
**Vacuum:** kPa  
**Vacuum:** Hg  
**Conformity:**

**Conformity:**  
**Conformity:**  
**Conformity:**  
**Conformity:**  
**Application** Pneumatic installations fed with filtered, lubricated air

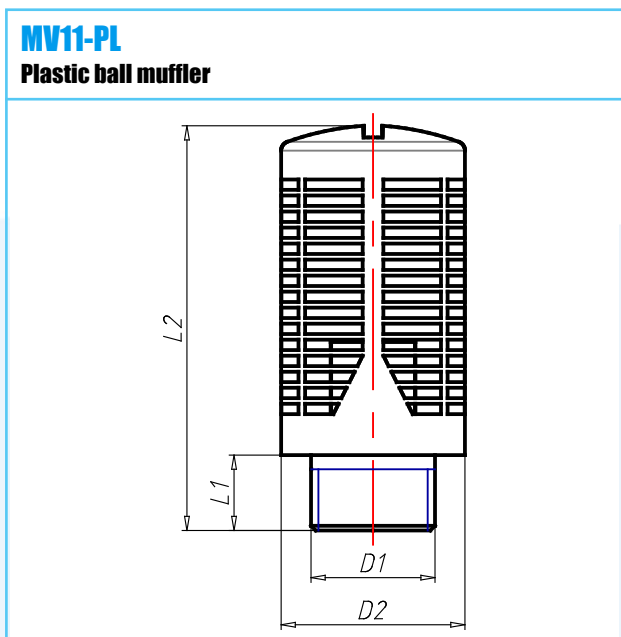

CODE	TYPE	D1	D2	D2IN	L1	L1IN	L2	L2IN	G	G0Z	NL	FT	WTF	WPP	CONF
04010001-PL	MV11 00 18-PL	G1/8	15.0	.591	6	.236	32.5	1.280	3.4	.120	87	-	14 ÷ 158	0 ÷ 87	RoHS
04010002-PL	MV11 00 14-PL	G1/4	19.5	.768	8	.315	43.0	1.693	6.5	.229	84	-	14 ÷ 158	0 ÷ 87	RoHS
04010003-PL	MV11 00 38-PL	G3/8	24.5	.965	11	.433	58.0	2.283	13.5	.476	90	-	14 ÷ 158	0 ÷ 87	RoHS
04010004-PL	MV11 00 12-PL	G1/2	24.5	.965	11	.433	58.0	2.283	15.1	.533	90	-	14 ÷ 158	0 ÷ 87	RoHS