


Material: Brass Chrome Plated
Working Temperature: -20 ÷ 80 °C°
Working Temperature: -4 ÷ 176 °F°
Working Pressure (max): 0 ÷ 10 bar
Working Pressure (max): 145 psi
Vacuum: kPa
Vacuum: Hg
Conformity:

Conformity:
Conformity:
Conformity:
Conformity:
Application Pneumatic installations fed with filtered, lubricated air

MV54

Ball Valve, male

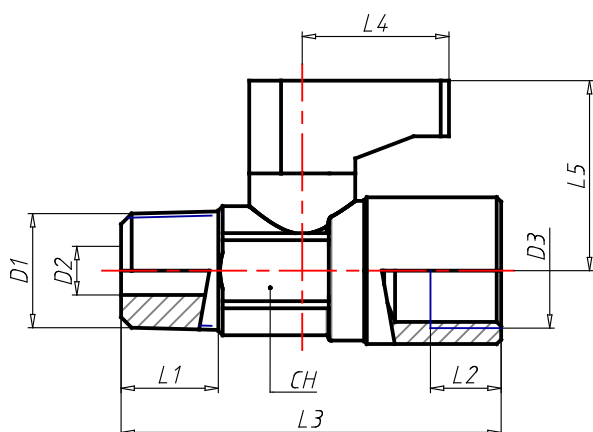

MV54

3D

CODE	TYPE	D1	D2	D2IN	D3	L1	L1IN	L2	L2IN	L3	L3IN	L4	L4IN	L5	L5IN	CH	G	GOZ	WTF	WPP	CONF
4440001	MV54 00 18	R1/8	5.5	.217	G1/8	8.0	.315	8.0	.315	35.5	1.398	19	.748	21.5	.846	14	34.3	1.210	-4 ÷ 176	145	RoHS
4440002	MV54 0014	R1/4	5.5	.217	G1/4	11.0	.433	11.0	.433	40.5	1.594	19	.748	21.5	.846	14	43.2	1.524	-4 ÷ 176	145	RoHS
4440003	MV54 00 38	R3/8	8.0	.315	G3/8	11.5	.453	10.5	.413	43.0	1.693	24	.945	24.0	.945	17	67.3	2.374	-4 ÷ 176	145	RoHS
4440004	MV54 00 12	R1/2	10.0	.394	G1/2	15.0	.591	12.0	.472	50.0	1.969	34	1.339	27.0	1.063	21	89.5	3.157	-4 ÷ 176	145	RoHS