

Material: 316L Stainless Steel
Working Temperature: -20 ÷ 180 °C°
Working Temperature: -4 ÷ 356 °F°
Working Pressure (max): 20 bar
Working Pressure (max): 290 psi
Vacuum: -99 kPa
Vacuum: 29" Hg
Conformity: NSF 169

Conformity: MOCA


Conformity: RoHS

Conformity:

Conformity:

Application Pneumatics, Food Industry, Chemical, Medical and Pharmaceutical Industry

MX29 Union Tee

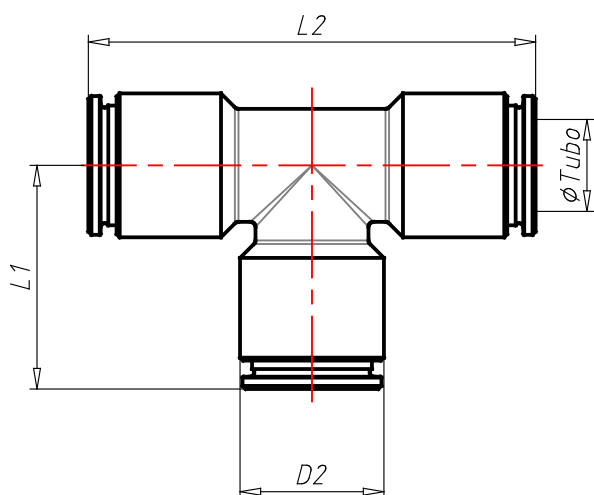

MX29

3D

CODE	TYPE	DTUBO	D2	D2IN	L1	L1IN	L2	L2IN	G	G0Z	WTF	WPP	TVH
X0190010	MX29 04 04	4	9	.354	17.5	.689	35	1.378	14.6	.515	-4 ÷ 356	290	29"
X0190030	MX29 06 06	6	12	.472	21.0	.827	42	1.654	29.9	1.055	-4 ÷ 356	290	29"
X0190040	MX29 08 08	8	14	.551	21.5	.846	43	1.693	32.4	1.143	-4 ÷ 356	290	29"
X0190050	MX29 10 10	10	16	.630	24.5	.965	49	1.929	56.1	1.979	-4 ÷ 356	290	29"
X0190060	MX29 12 12	12	18	.709	27.0	1.063	54	2.126	65.9	2.325	-4 ÷ 356	290	29"