


Material:	Brass Nickel Plated	
Working Temperature:	-20 ÷ 80	C°
Working Temperature:	-4 ÷ 176	F°
Working Pressure (max):	20	bar
Working Pressure (max):	290	psi
Vacuum:	-99	kPa
Vacuum:	29"	Hg
Conformity:	Silicone Free	

Conformity:	RoHS
Conformity:	
Conformity:	
Application	Pneumatic circuits

PN15

Swivelling Elbow Fitting, male

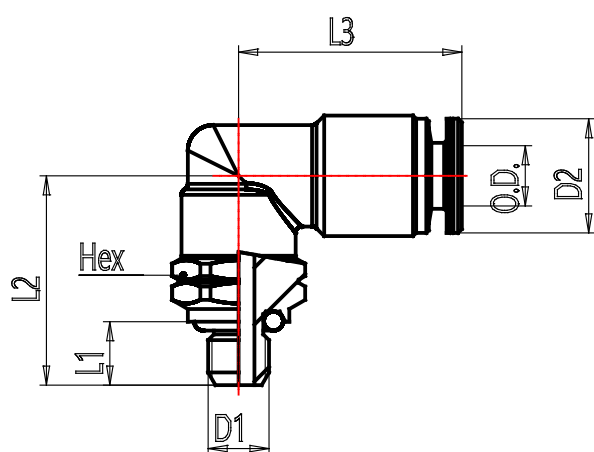

PN15

3D

CODE	TYPE	DTUBO	D1	D2	D2IN	L1	L1IN	L2	L2IN	L3	L3IN	CH	G	OZ	WTF	WPP	TVH
20050000	PN15 1/8 10-32	1/8	10-32UNF	7	.276	5	.197	16,2	.637	14	.551	5/16	8,00	.282	-4 ÷ 176	290	29"
20050001	PN15 1/8 1/8	1/8	1/8NPTF	7	.276	8,5	.335	18,2	.716	14	.551	7/16	10,5	.370	-4 ÷ 176	290	29"
20050010	PN15 5/32 10-32	5/32	10-32UNF	9,1	.358	5	.197	16,5	.650	17,5	.689	3/8	10,00	.353	-4 ÷ 176	290	29"
20050011	PN15 5/32 1/8	5/32	1/8NPTF	9,1	.358	8,5	.335	18,5	.728	17,5	.689	7/16	12,50	.441	-4 ÷ 176	290	29"
20050012	PN15 5/32 1/4	5/32	1/4NPTF	9,1	.358	13	.512	26	1.024	19	.748	9/16	22,50	.794	-4 ÷ 176	290	29"
20050031	PN15 1/4 1/8	1/4	1/8NPTF	12	.472	8,5	.335	21,2	.835	22	.866	1/2	19,50	.688	-4 ÷ 176	290	29"
20050032	PN15 1/4 1/4	1/4	1/4NPTF	12	.472	13	.512	26,2	1.031	22	.866	9/16	24,50	.864	-4 ÷ 176	290	29"
20050033	PN15 1/4 3/8	1/4	3/8NPTF	12	.472	13	.512	26,7	1.051	22	.866	11/16	31	1.093	-4 ÷ 176	290	29"
20050041	PN15 5/16 1/8	5/16	1/8NPTF	14	.551	8,5	.335	21,2	.835	22,5	.886	1/2	23,00	.811	-4 ÷ 176	290	29"
20050042	PN15 5/16 1/4	5/16	1/4NPTF	14	.551	13	.512	26,2	1.031	22,5	.886	9/16	27,5	.970	-4 ÷ 176	290	29"
20050043	PN15 5/16 3/8	5/16	3/8NPTF	14	.551	13	.512	28,5	1.122	23	.906	11/16	40	1.411	-4 ÷ 176	290	29"
20050051	PN15 3/8 1/8	3/8	1/8NPTF	16	.630	8,5	.335	24	.945	26	1.024	11/16	39	1.376	-4 ÷ 176	290	29"

20050052	PN15 3/8 1/4	3/8	1/4NPTF	16	.630	13	.512	28,5	1.122	26	1.024	11/16	42,5	1.499	-4 ÷ 176	290	29"
20050053	PN15 3/8 3/8	3/8	3/8NPTF	16	.630	13	.512	28,5	1.122	26	1.024	11/16	43,5	1.534	-4 ÷ 176	290	29"
20050054	PN15 3/8 1/2	3/8	1/2NPTF	16	.630	17	.669	34	1.339	26	1.024	7/8	62	2.187	-4 ÷ 176	290	29"
20050062	PN15 1/2 1/4	1/2	1/4NPTF	20	.787	13	.512	32	1.260	28,5	1.122	13/16	67,5	2.381	-4 ÷ 176	290	29"
20050063	PN15 1/2 3/8	1/2	3/8NPTF	20	.787	13	.512	32	1.260	28,5	1.122	13/16	64	2.258	-4 ÷ 176	290	29"
20050064	PN15 1/2 1/2	1/2	1/2NPTF	20	.787	17	.669	36,5	1.437	28,5	1.122	7/8	76,5	2.698	-4 ÷ 176	290	29"