


Material: Brass Nickel Plated
Working Temperature: -20 ÷ 80 °C°
Working Temperature: -4 ÷ 176 °F°
Working Pressure (max): 20 bar
Working Pressure (max): 290 psi
Vacuum: -99 kPa
Vacuum: 29" Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

PN29 Union Tee

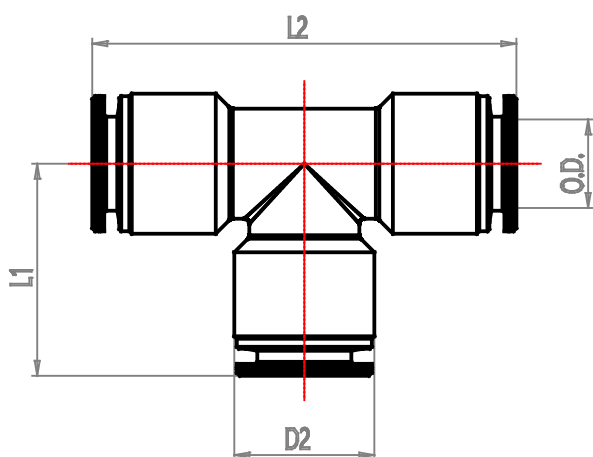

PN29

3D

CODE	TYPE	DTUB0	DTUB02	D2	D2IN	D3	D3IN	L1	L1IN	L2	L2IN	G	OZ	WTF	WPP	TVH
20190000	PN29 1/8 1/8	1/8	1/8	7	.276	7	.276	12,8	.504	25,6	1.008	5,5	.194	-4 ÷ 176	290	29"
20190010	PN29 5/32 5/32	5/32	5/32	9	.354	9	.354	17,5	.689	35	1.378	12,50	.441	-4 ÷ 176	290	29"
20190030	PN29 1/4 1/4	1/4	1/4	12	.472	12	.472	20	.787	40	1.575	20,00	.705	-4 ÷ 176	290	29"
20190040	PN29 5/16 5/16	5/16	5/16	14	.551	14	.551	21	.827	42	1.654	28,00	.988	-4 ÷ 176	290	29"
20190050	PN29 3/8 3/8	3/8	3/8	16	.630	16	.630	24,5	.965	49	1.929	42,5	1.499	-4 ÷ 176	290	29"
20190060	PN29 1/2 1/2	1/2	1/2	20	.787	20	.787	27	1.063	54	2.126	69	2.434	-4 ÷ 176	290	29"
20195030	PN29 3/8 1/4	3/8	1/4	16	.630	12	.472	22,5	.886	49	1.929	-	-	-4 ÷ 176	290	29"
20196030	PN29 1/2 1/4	1/2	1/4	20	.787	12	.472	24,5	.965	54	2.126	-	-	-4 ÷ 176	290	29"
20196050	PN29 1/2 3/8	1/2	3/8	20	.787	16	.630	27	1.063	54	2.126	-	-	-4 ÷ 176	290	29"