
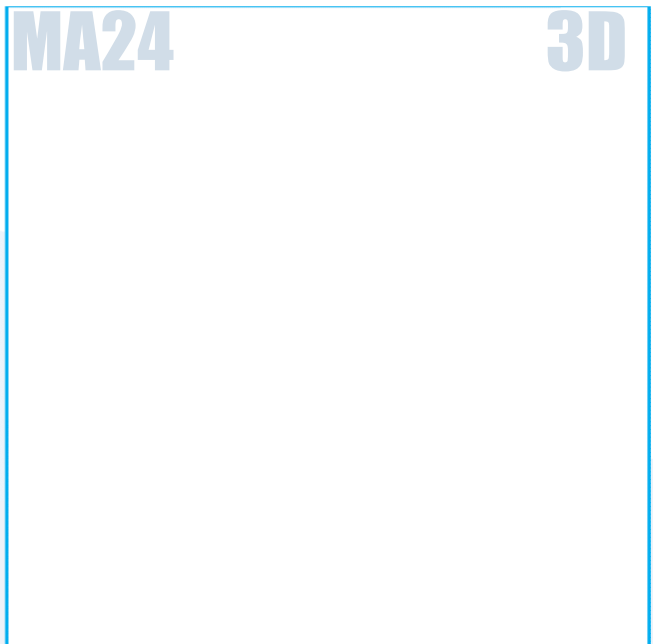


**Material:** Brass Nickel Plated  
**Working Temperature:** -20 ÷ 70 C°  
**Working Temperature:** F°  
**Working Pressure (max):** 18 bar  
**Working Pressure (max):** psi  
**Vacuum:** -99 kPa  
**Vacuum:** Hg  
**Conformity:** Silicone Free

**Conformity:** RoHS  
**Conformity:**  
**Conformity:**  
**Conformity:**  
**Application** Pneumatic circuits

**MA24**  
Lateral Swivelling Tee Fitting, parallel

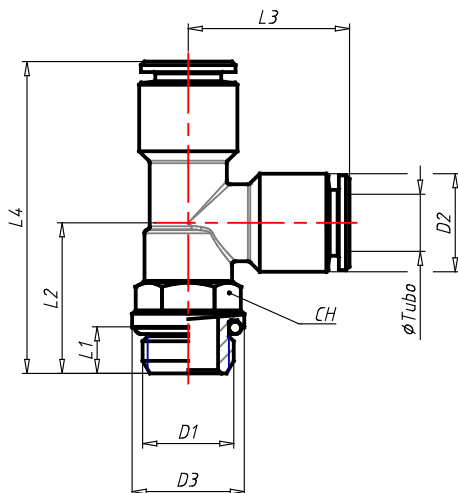

CODE	TYPE	TUBO	D1	D2	D3	L1	L2	L3	L4	CH	G
A0140011	MA24 04 18	4	G1/8	9	14.5	5.0	18.0	19.5	37.5	13	20.5
A0140012	MA24 04 14	4	G1/4	9	16.0	6.5	21.5	19.5	41.0	13	24.0
A0140031	MA24 06 18	6	G1/8	12	14.5	5.0	18.0	22.0	40.0	13	26.0
A0140032	MA24 06 14	6	G1/4	12	16.0	6.5	21.5	22.0	43.5	13	29.5
A0140041	MA24 08 18	8	G1/8	14	14.5	5.0	18.0	22.5	40.5	13	30.0
A0140042	MA24 08 14	8	G1/4	14	16.0	6.5	21.5	22.5	44.0	13	33.5
A0140052	MA24 10 14	10	G1/4	16	16.0	6.5	22.0	26.0	48.0	16	44.0
A0140053	MA24 10 38	10	G3/8	16	20.0	7.0	25.5	26.0	51.5	16	49.0
A0140063	MA24 12 38	12	G3/8	19	20.0	7.0	26.0	28.5	54.5	20	73.0
A0140064	MA24 12 12	12	G1/2	19	25.0	8.5	30.5	28.5	59.0	20	77.0