


Material: Brass Nickel Plated
Working Temperature: -20 ÷ 70 C°
Working Temperature: -4 ÷ 160 F°
Working Pressure (max): 18 bar
Working Pressure (max): 261 psi
Vacuum: -99 kPa
Vacuum: 29" Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

PN11

Taper Straight, male

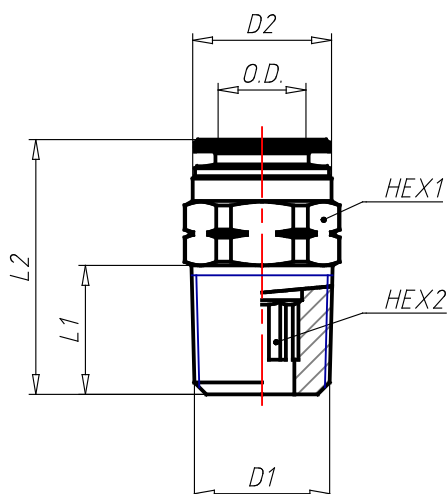

PN11

3D

CODE	TYPE	TUBE OD	D1	D2	D2IN	L1	L1IN	L2	L2IN	HEX1	HEX2	G	G0Z
20010000	PN11 1/8 10-32	1/8"	10-32	7	.276	5	.197	16.7	.657	-	3/32	2.5	.088
20010001	PN11 1/8 1/8	1/8"	1/8	7	.276	8.5	.335	18.5	.728	7/16	3/32	9.5	.335
20010010	PN11 5/32 10-32	5/32"	10-32	9.5	.374	5	.197	20	.787	-	3/32	4.5	.159
20010011	PN11 5/32 1/8	5/32"	1/8	9.5	.374	8.5	.335	19.5	.768	7/16"	1/8	9.0	.317
20010012	PN11 5/32 1/4	5/32"	1/4	9.5	.374	13	.512	24	.945	9/16"	1/8	20.0	.705
20010030	PN11 1/4 10-32	1/4"	10-32	12	.472	5	.197	23.5	.925	-	3/32	8.5	.300
20010031	PN11 1/4 1/8	1/4"	1/8	12	.472	8.5	.335	22	.866	1/2"	5/32	10.5	.370
20010032	PN11 1/4 1/4	1/4"	1/4	12	.472	13	.512	24.5	.965	9/16"	5/32	18.5	.653
20010033	PN11 1/4 3/8	1/4"	3/8	12	.472	13	.512	25.5	1.004	11/16	5/32	31.9	1.125
20010041	PN11 5/16 1/8	5/16"	1/8	14	.551	8.5	.335	26.5	1.043	9/16"	3/16	15.0	.529
20010042	PN11 5/16 1/4	5/16"	1/4	14	.551	13	.512	25.5	1.004	9/16"	1/4	16.0	.564
20010043	PN11 5/16 3/8	5/16"	3/8	14	.551	13	.512	25	.984	11/16"	1/4	28.0	.988
20010051	PN11 3/8 1/8	3/8"	1/8	16	.630	8.5	.335	28.5	1.122	11/16"	3/16	22.5	.794
20010052	PN11 3/8 1/4	3/8"	1/4	16	.630	13	.512	32	1.260	11/16"	1/4	27.0	.952