
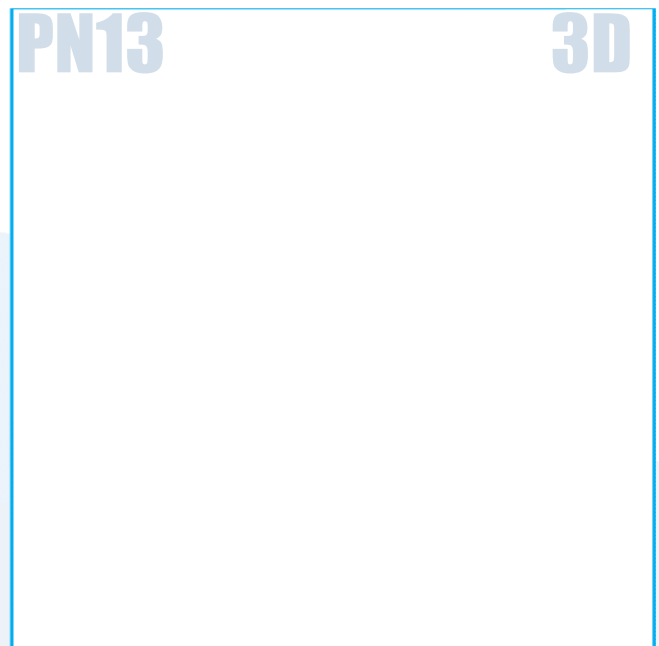


Material: Brass Nickel Plated
Working Temperature: -20 ÷ 70 C°
Working Temperature: -4 ÷ 160 F°
Working Pressure (max): 18 bar
Working Pressure (max): 261 psi
Vacuum: -99 kPa
Vacuum: 29" Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

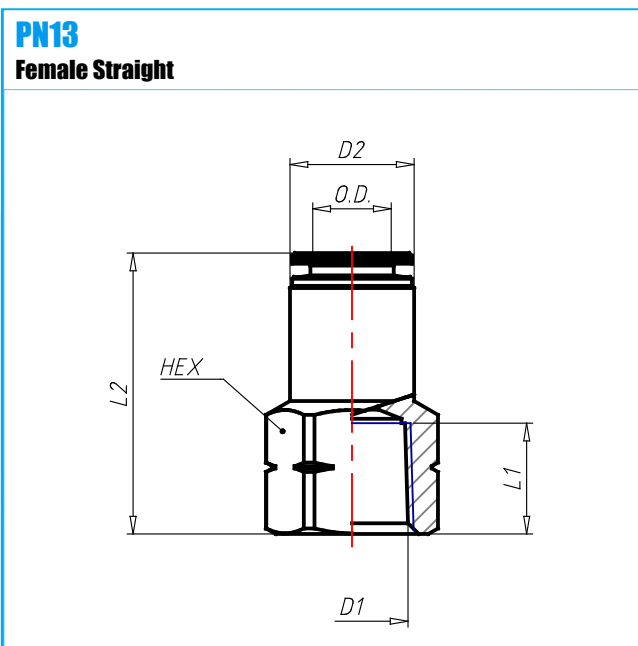

CODE	TYPE	TUBEOD	D1	D2	D2IN	L1	L1IN	L2	L2IN	HEX	G	G0Z
20030011	PN13 5/32 1/8	5/32"	1/8	9.5	.374	8.5	.335	25	.984	1/2	11.5	.406
20030031	PN13 1/4 1/8	1/4"	1/8	12	.472	8.5	.335	27	1.063	1/2	14	.494
20030032	PN13 1/4 1/4	1/4"	1/4	12	.472	12.5	.492	31.5	1.240	11/16"	26.5	.935
20030041	PN13 5/16 1/8	5/16"	1/8	14	.551	8.5	.335	27	1.063	9/16"	20	.705
20030042	PN13 5/16 1/4	5/16"	1/4	14	.551	12.5	.492	31.5	1.240	11/16"	28.5	1.005
20030052	PN13 3/8 1/4	3/8"	1/4	16	.630	12.5	.492	34	1.339	11/16"	32.5	1.146
20030053	PN13 3/8 3/8	3/8"	3/8	16	.630	12.5	.492	34	1.339	13/16"	37.5	1.323