
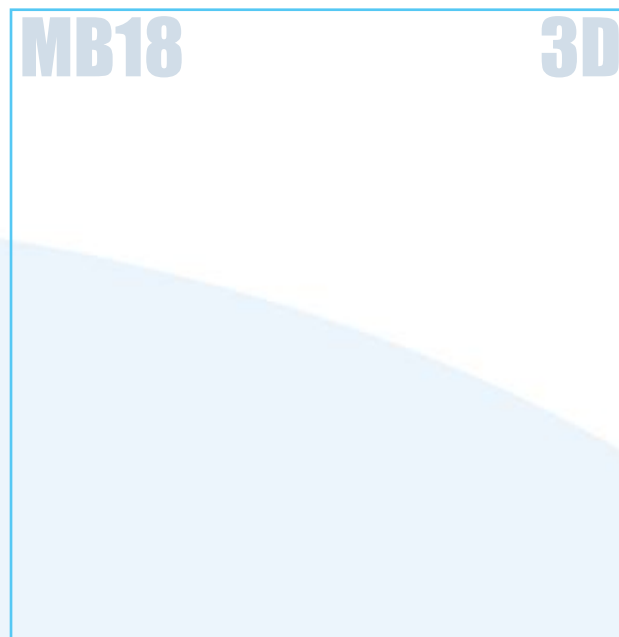


Material: Acetal Resin
Working Temperature: -20 ÷ 70 C°
Working Temperature: -4 ÷ 158 F°
Working Pressure (max): 18 bar
Working Pressure (max): 261 psi
Vacuum: -99 kPa
Vacuum: Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

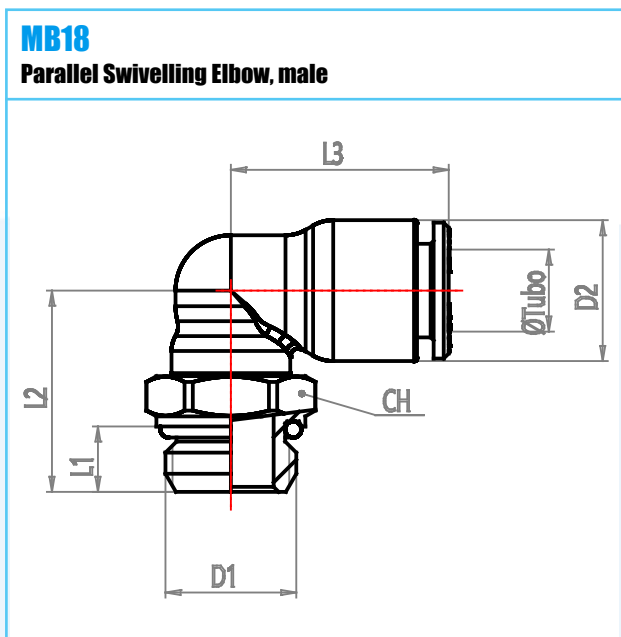

| CODE | TYPE | DTUBO | D1 | D2 | D2IN | L1 | L1IN | L2 | L2IN | L3 | L3IN | CH | G | OZ | WTF | WPP |
|----------|------------|-------|--------|------|------|-----|------|------|-------|------|-------|----|------|-------|----------|-----|
| B0080010 | MB18 04 M5 | 4 | M5x0,8 | 9,5 | .374 | 4 | .157 | 14,8 | .583 | 16 | .630 | 9 | 4,6 | .162 | -4 ÷ 158 | 261 |
| B0080011 | MB18 04 18 | 4 | G1/8 | 9,5 | .374 | 5 | .197 | 15 | .591 | 16 | .630 | 13 | 7,1 | .250 | -4 ÷ 158 | 261 |
| B0080012 | MB18 04 14 | 4 | G1/4 | 9,5 | .374 | 6,5 | .256 | 17 | .669 | 16 | .630 | 16 | 11,1 | .392 | -4 ÷ 158 | 261 |
| B0080030 | MB18 06 M5 | 6 | M5x0,8 | 11,5 | .453 | 4 | .157 | 15,3 | .602 | 20,5 | .807 | 12 | 7,9 | .279 | -4 ÷ 158 | 261 |
| B0080031 | MB18 06 18 | 6 | G1/8 | 11,5 | .453 | 5 | .197 | 17,3 | .681 | 20,5 | .807 | 12 | 8,4 | .296 | -4 ÷ 158 | 261 |
| B0080032 | MB18 06 14 | 6 | G1/4 | 11,5 | .453 | 6,5 | .256 | 19,3 | .760 | 20,5 | .787 | 15 | 12,5 | .441 | -4 ÷ 158 | 261 |
| B0080041 | MB18 08 18 | 8 | G1/8 | 14 | .551 | 5 | .197 | 18 | .709 | 21,5 | .846 | 12 | 8,8 | .310 | -4 ÷ 158 | 261 |
| B0080042 | MB18 08 14 | 8 | G1/4 | 14 | .551 | 6,5 | .256 | 20 | .787 | 21,5 | .846 | 15 | 12 | .423 | -4 ÷ 158 | 261 |
| B0080043 | MB18 08 38 | 8 | G3/8 | 14 | .551 | 7 | .276 | 21,5 | .846 | 21,5 | .846 | 20 | 21,4 | .755 | -4 ÷ 158 | 261 |
| B0080052 | MB18 10 14 | 10 | G1/4 | 16 | .630 | 6,5 | .256 | 21,5 | .846 | 24,5 | .965 | 16 | 15,6 | .550 | -4 ÷ 158 | 261 |
| B0080053 | MB18 10 38 | 10 | G3/8 | 16 | .630 | 6,5 | .256 | 23,5 | .925 | 24,5 | .965 | 20 | 22,8 | .804 | -4 ÷ 158 | 261 |
| B0080063 | MB18 12 38 | 12 | G3/8 | 19 | .748 | 7 | .276 | 24 | .945 | 28,5 | 1.122 | 20 | 26,2 | .924 | -4 ÷ 158 | 261 |
| B0080064 | MB18 12 12 | 12 | G1/2 | 19 | .748 | 8,5 | .335 | 28,5 | 1.122 | 28,5 | 1.122 | 20 | 33,8 | 1.192 | -4 ÷ 158 | 261 |

| | | | | | | | | | | | | | | | | |
|----------|------------|----|------|------|------|-----|------|------|-------|------|-------|----|------|-------|----------|-----|
| B0080073 | MB18 14 38 | 14 | G3/8 | 22,5 | .886 | 7 | .276 | 25 | .984 | 32,3 | 1.272 | 20 | 28,8 | 1.016 | -4 ÷ 158 | 261 |
| B0080074 | MB18 14 12 | 14 | G1/2 | 22,5 | .886 | 8,5 | .335 | 29,5 | 1.161 | 32,3 | 1.272 | 20 | 36,5 | 1.287 | -4 ÷ 158 | 261 |