
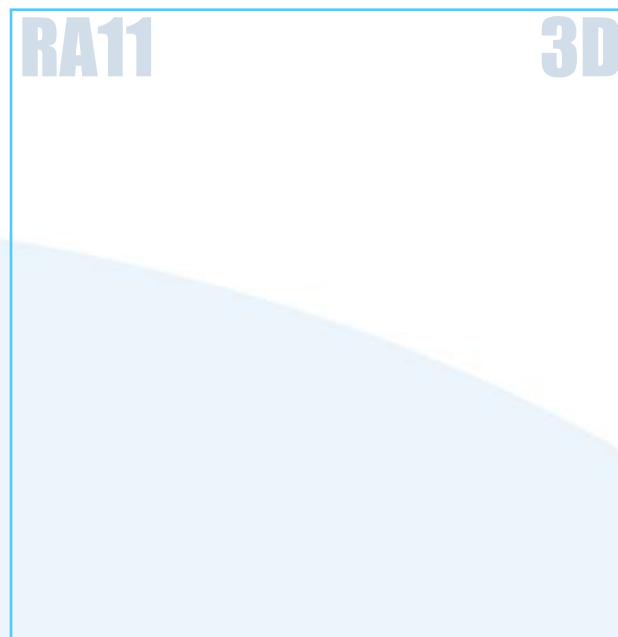


**Material:** Brass Nickel Plated  
**Working Temperature:** -40 ÷ 150 C°  
**Working Temperature:** -40 ÷ 302 F°  
**Working Pressure (max):** 60 bar  
**Working Pressure (max):** 870 psi  
**Vacuum:** kPa  
**Vacuum:** Hg  
**Conformity:** RoHS

**Conformity:**  
**Conformity:**  
**Conformity:**  
**Conformity:**  
**Application** Pneumatic, hydraulic and oleodynamic circuits

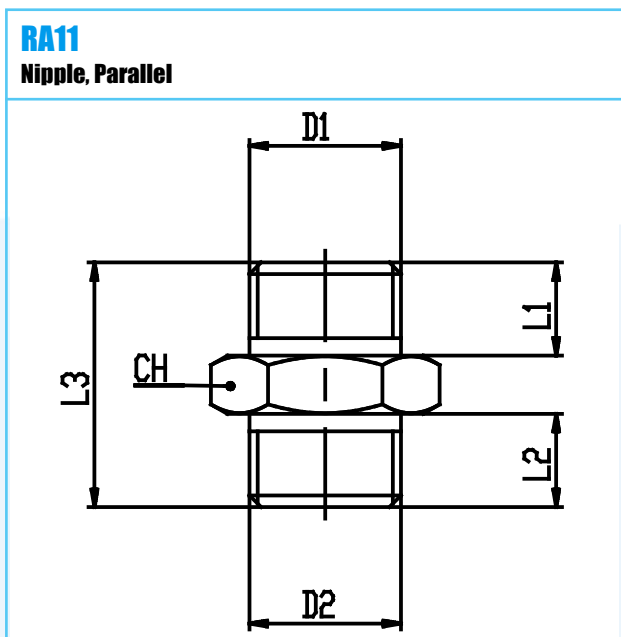

| CODE    | TYPE       | D1     | D2     | L1 | L1IN | L2 | L2IN | L3   | L3IN  | CH | G    | OZ    | WTF       | WPP |
|---------|------------|--------|--------|----|------|----|------|------|-------|----|------|-------|-----------|-----|
| 5010000 | RA11 M5 M5 | M5x0,8 | M5x0,8 | 5  | .197 | 5  | .197 | 13.5 | .531  | 8  | 2.0  | .071  | -40 ÷ 302 | 870 |
| 5010001 | RA11 M5 18 | M5x0,8 | G1/8   | 4  | .157 | 6  | .236 | 14.5 | .571  | 14 | 8.0  | .282  | -40 ÷ 302 | 870 |
| 5010101 | RA11 18 18 | G1/8   | G1/8   | 6  | .236 | 6  | .236 | 16.5 | .650  | 14 | 8.0  | .282  | -40 ÷ 302 | 870 |
| 5010102 | RA11 18 14 | G1/8   | G1/4   | 6  | .236 | 8  | .315 | 19.0 | .748  | 17 | 16.2 | .571  | -40 ÷ 302 | 870 |
| 5010103 | RA11 18 38 | G1/8   | G3/8   | 6  | .236 | 9  | .354 | 20.0 | .787  | 19 | 19.0 | .670  | -40 ÷ 302 | 870 |
| 5010202 | RA11 14 14 | G1/4   | G1/4   | 8  | .315 | 8  | .315 | 21.0 | .827  | 17 | 18.8 | .663  | -40 ÷ 302 | 870 |
| 5010203 | RA11 14 38 | G1/4   | G3/8   | 8  | .315 | 9  | .354 | 22.0 | .866  | 19 | 23.5 | .829  | -40 ÷ 302 | 870 |
| 5010204 | RA11 14 12 | G1/4   | G1/2   | 8  | .315 | 10 | .394 | 23.5 | .925  | 24 | 32.0 | 1.129 | -40 ÷ 302 | 870 |
| 5010303 | RA11 38 38 | G3/8   | G3/8   | 9  | .354 | 9  | .354 | 23.0 | .906  | 19 | 23.0 | .811  | -40 ÷ 302 | 870 |
| 5010304 | RA11 38 12 | G3/8   | G1/2   | 9  | .354 | 10 | .394 | 24.5 | .965  | 24 | 31.8 | 1.122 | -40 ÷ 302 | 870 |
| 5010404 | RA11 12 12 | G1/2   | G1/2   | 10 | .394 | 10 | .394 | 25.5 | 1.004 | 24 | 35.0 | 1.235 | -40 ÷ 302 | 870 |