


Material: Brass Nickel Plated
Working Temperature: -40 ÷ 150 C°
Working Temperature: -40 ÷ 302 F°
Working Pressure (max): 60 bar
Working Pressure (max): 870 psi
Vacuum: kPa
Vacuum: Hg
Conformity: RoHS

Conformity:
Conformity:
Conformity:
Conformity:
Application Pneumatic, hydraulic and oleodynamic circuits

RA14

Taper female-male reducing connector

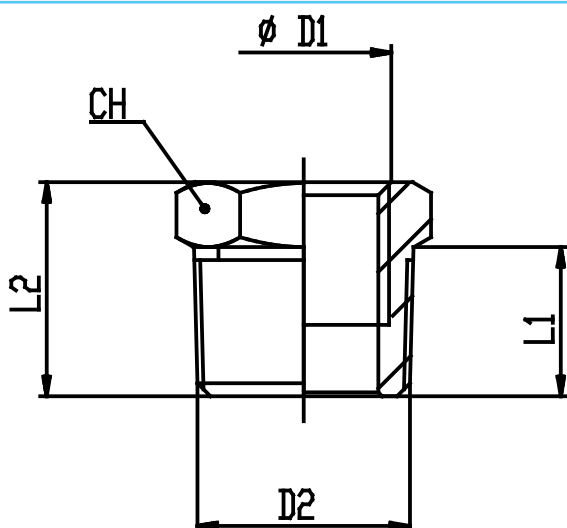

RA14

3D

CODE	TYPE	D1	D2	L1	L1IN	L2	L2IN	CH	G	OZ	WTF	WPP
5040102	RA14 18 14	G1/8	R1/4	11.0	.433	16.0	.630	14	10.2	.360	-40 ÷ 302	870
5040103	RA14 18 38	G1/8	R3/8	11.5	.453	16.5	.650	17	20.2	.713	-40 ÷ 302	870
5040104	RA14 18 12	G1/8	R1/2	14.0	.551	19.5	.768	22	34.8	1.228	-40 ÷ 302	870
5040203	RA14 14 38	G1/4	R3/8	11.5	.453	16.5	.650	17	15.0	.529	-40 ÷ 302	870
5040204	RA14 14 12	G1/4	R1/2	14.0	.551	19.5	.768	22	31.5	1.111	-40 ÷ 302	870
5040304	RA14 38 12	G3/8	R1/2	14.0	.551	19.5	.768	22	24.1	.850	-40 ÷ 302	870
5040305	RA14 38 34	G3/8	R3/4	16.5	.650	23.0	.906	27	70.0	2.469	-40 ÷ 302	870
5040405	RA14 12 34	G1/2	R3/4	16.5	.650	23.0	.906	27	44.6	1.573	-40 ÷ 302	870
5040406	RA14 12 1	G1/2	R1"	19.0	.748	27.0	1.063	34	102.5	3.616	-40 ÷ 302	870
5040506	RA14 34 1	G3/4	R1"	19.0	.748	27.0	1.063	34	74.2	2.617	-40 ÷ 302	870