


Material: Brass Nickel Plated
Working Temperature: -40 ÷ 150 C°
Working Temperature: -40 ÷ 302 F°
Working Pressure (max): 60 bar
Working Pressure (max): 870 psi
Vacuum: kPa
Vacuum: Hg
Conformity: RoHS

Conformity:
Conformity:
Conformity:
Conformity:
Application Pneumatic, hydraulic and oleodynamic circuits

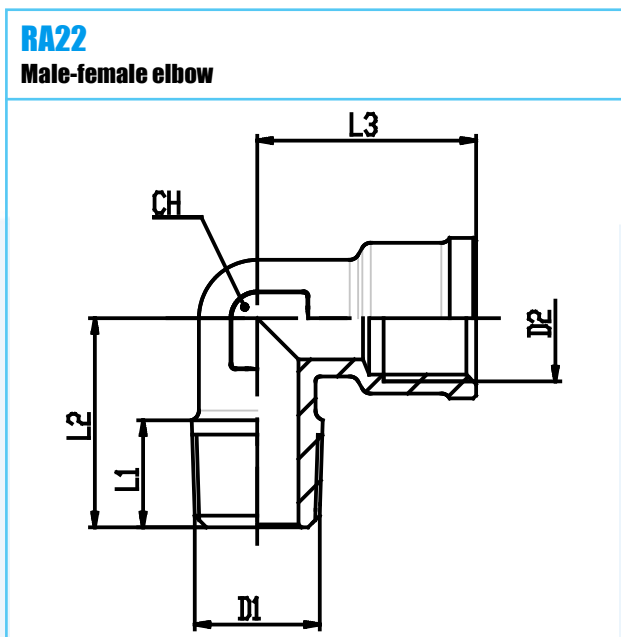

CODE	TYPE	D1	D2	L1	L1IN	L2	L2IN	L3	L3IN	CH	G	OZ	WTF	WPP
5120001	RA22 18 18	R1/8	G1/8	8.2	.323	17.0	.669	18.5	.728	10	12.6	.444	-40 ÷ 302	870
5120002	RA22 14 14	R1/4	G1/4	11.0	.433	21.5	.846	22.5	.886	12	23.9	.843	-40 ÷ 302	870
5120003	RA22 38 38	R3/8	G3/8	12.0	.472	24.5	.965	25.5	1.004	15	40.9	1.443	-40 ÷ 302	870
5120004	RA22 12 12	R1/2	G1/2	14.0	.551	29.5	1.161	30.0	1.181	19	74.7	2.635	-40 ÷ 302	870
5120005	RA22 34 34	R3/4	G3/4	16.0	.630	33.0	1.299	36.5	1.437	25	98.1	3.460	-40 ÷ 302	870
5120006	RA22 1 1	R1"	G1"	17.0	.669	39.0	1.535	45.0	1.772	30	164.0	5.785	-40 ÷ 302	870