
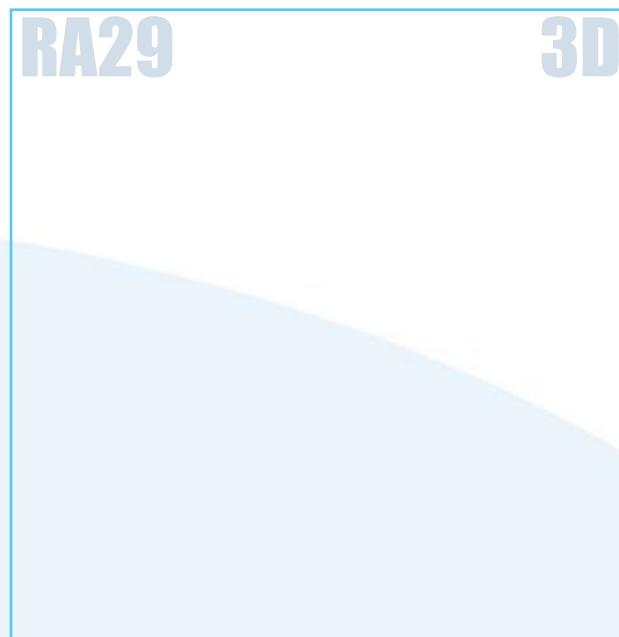


Material: Anodised Aluminium
Working Temperature: -40 ÷ 150 C°
Working Temperature: -40 ÷ 302 F°
Working Pressure (max): 60 bar
Working Pressure (max): 870 psi
Vacuum: kPa
Vacuum: Hg
Conformity: RoHS

Conformity:
Conformity:
Conformity:
Conformity:
Application Pneumatic, hydraulic and oleodynamic circuits

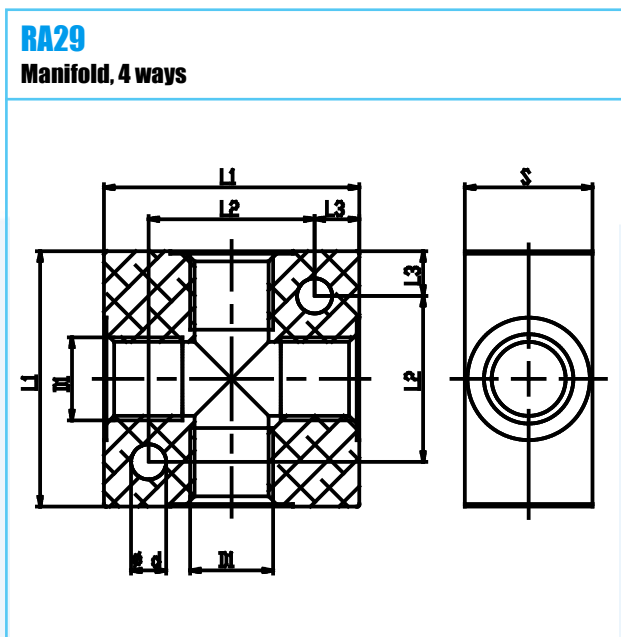

CODE	TYPE	D1	D	DIN	L1	L1IN	L2	L2IN	L3	L3IN	S	SIN	G	OZ	WTF	WPP
05190000	RA29 00 M5	M5x0,8	3.5	.138	20	.787	14	.551	3	.118	10	.394	9	.317	-40 ÷ 302	870
05190001	RA29 00 18	G1/8	4.5	.177	25	.984	17	.669	4	.157	16	.630	18	.635	-40 ÷ 302	870
05190002	RA29 00 14	G1/4	5.5	.217	40	1.575	26	1.024	7	.276	20	.787	64	2.258	-40 ÷ 302	870
05190003	RA29 00 38	G3/8	5.5	.217	50	1.969	34	1.339	8	.315	25	.984	125	4.409	-40 ÷ 302	870
05190004	RA29 00 12	G1/2	5.5	.217	50	1.969	34	1.339	8	.315	30	1.181	130	4.586	-40 ÷ 302	870