


Material:	Aluminium	
Working Temperature:	-40 ÷ 150	C°
Working Temperature:	-40 ÷ 302	F°
Working Pressure (max):	60	bar
Working Pressure (max):	870	psi
Vacuum:		kPa
Vacuum:		Hg
Conformity:	RoHS	

Conformity:	
Conformity:	
Conformity:	
Conformity:	
Application	Pneumatic, hydraulic and oleodynamic circuits

RA29S

Manifold, single

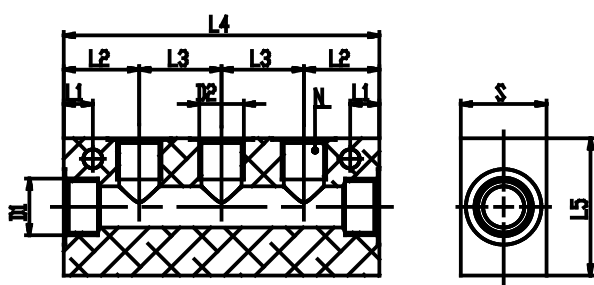

RA29S

3D

CODE	TYPE	D1	D2	N	L1	L1IN	L2	L2IN	L3	L3IN	L4	L4IN	L5	L5IN	S	SIN	G	OZ	WTF	WPP
05190201-S3	RA29 14 18 S3	G1/4	G1/8	3	4.5	.177	18	.709	18	.709	72	2.835	30	1.181	20	.787	86	3.034	-40 ÷ 302	870
05190201-S4	RA29 14 18 S4	G1/4	G1/8	4	4.5	.177	18	.709	18	.709	90	3.543	30	1.181	20	.787	110	3.880	-40 ÷ 302	870
05190201-S5	RA29 14 18 S5	G1/4	G1/8	5	4.5	.177	18	.709	18	.709	108	4.252	30	1.181	20	.787	130	4.586	-40 ÷ 302	870
05190302-S3	RA29 38 14 S3	G3/8	G1/4	3	8.5	.335	22	.866	24	.945	92	3.622	40	1.575	25	.984	184	6.490	-40 ÷ 302	870
05190302-S4	RA29 38 14 S4	G3/8	G1/4	4	8.5	.335	22	.866	24	.945	116	4.567	40	1.575	25	.984	238	8.395	-40 ÷ 302	870
05190302-S5	RA29 38 14 S5	G3/8	G1/4	5	8.5	.335	22	.866	24	.945	140	5.512	40	1.575	25	.984	298	10.512	-40 ÷ 302	870