
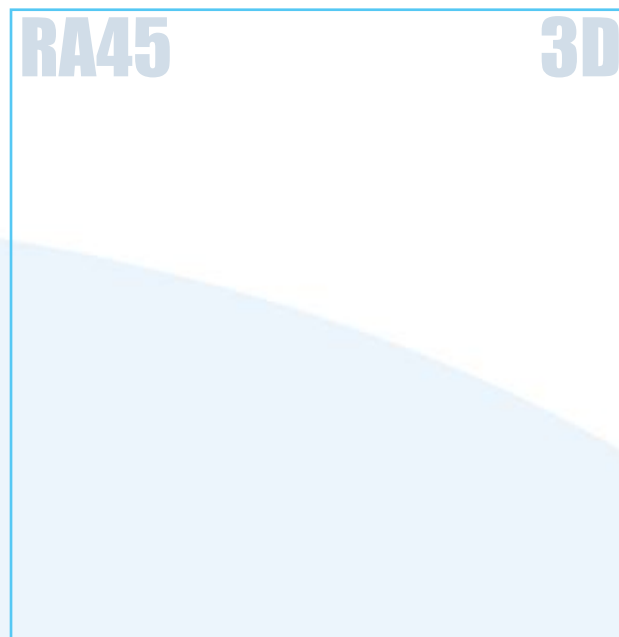


Material: Brass Nickel Plated
Working Temperature: -40 ÷ 150 C°
Working Temperature: -40 ÷ 302 F°
Working Pressure (max): 60 bar
Working Pressure (max): 870 psi
Vacuum: kPa
Vacuum: Hg
Conformity: RoHS

Conformity:
Conformity:
Conformity:
Conformity:
Application Pneumatic, hydraulic and oleodynamic circuits

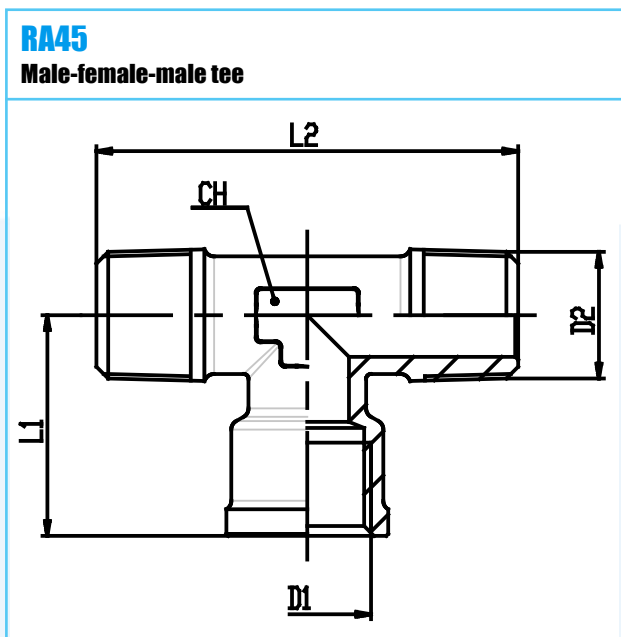

CODE	TYPE	D1	D2	L1	L1IN	L2	L2IN	CH	G	OZ	WTF	WPP
5350001	RA45 18 18	G1/8	R1/8	18.5	.728	34	1.339	10	16.6	.586	-40 ÷ 302	870
5350002	RA45 14 14	G1/4	R1/4	22.5	.886	43	1.693	12	31.3	1.104	-40 ÷ 302	870
5350003	RA45 38 38	G3/8	R3/8	25.5	1.004	49	1.929	15	64.5	2.275	-40 ÷ 302	870
5350004	RA45 12 12	G1/2	R1/2	30.0	1.181	59	2.323	19	95.4	3.365	-40 ÷ 302	870