


Material: Brass Nickel Plated
Working Temperature: -20 ÷ 80 C°
Working Temperature: -4 ÷ 176 F°
Working Pressure (max): 60 bar
Working Pressure (max): 870 psi
Vacuum: kPa
Vacuum: Hg
Conformity: RoHS

Conformity:
Conformity:
Conformity:
Conformity:
Application Pneumatic, hydraulic and oleodynamic circuits

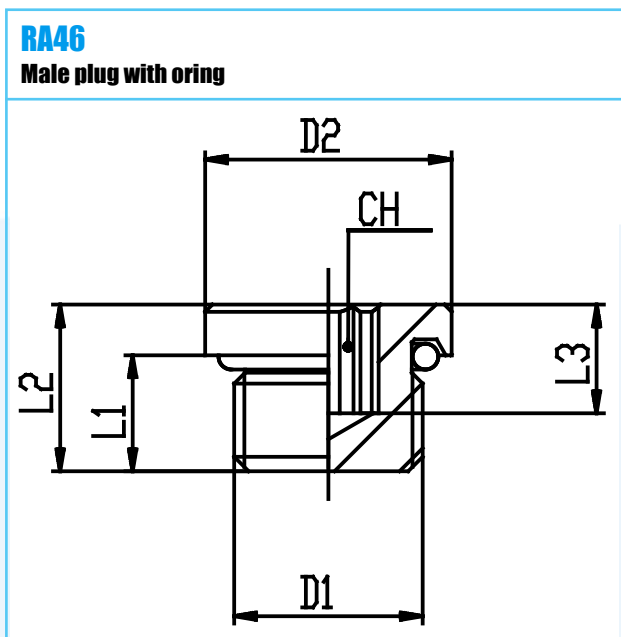

CODE	TYPE	D1	D2	D2IN	L1	L1IN	L2	L2IN	L3	L3IN	CH	G	OZ	WTF	WPP
5360001	RA46 00 18	G1/8	14	.551	6.5	.256	9.5	.374	5.5	.217	5	5.5	.194	-4 ÷ 176	870
5360002	RA46 00 14	G1/4	17	.669	8.0	.315	11.5	.453	6.5	.256	6	11.5	.406	-4 ÷ 176	870
5360003	RA46 00 38	G3/8	20	.787	9.0	.354	12.5	.492	6.0	.236	8	17.8	.628	-4 ÷ 176	870
5360004	RA46 00 12	G1/2	26	1.024	10.0	.394	14.0	.551	7.0	.276	10	33.0	1.164	-4 ÷ 176	870