
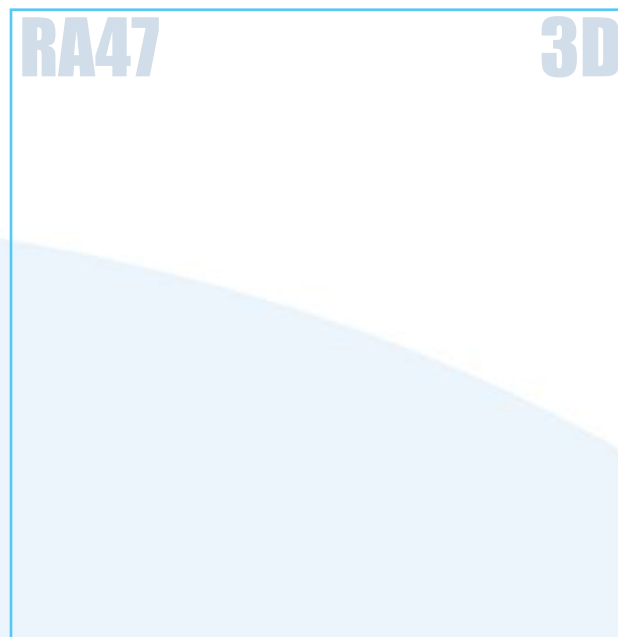


**Material:** Brass Nickel Plated  
**Working Temperature:** -40 ÷ 150 C°  
**Working Temperature:** -40 ÷ 302 F°  
**Working Pressure (max):** 60 bar  
**Working Pressure (max):** 870 psi  
**Vacuum:** kPa  
**Vacuum:** Hg  
**Conformity:** RoHS

**Conformity:**  
**Conformity:**  
**Conformity:**  
**Conformity:**  
**Application** Pneumatic, hydraulic and oleodynamic circuits

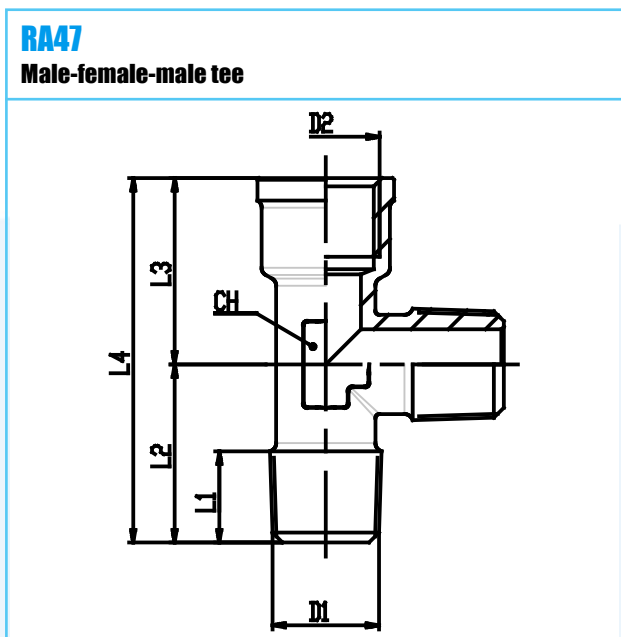

CODE	TYPE	D1	D2	L1	L1IN	L2	L2IN	L3	L3IN	L4	L4IN	CH	G	OZ	WTF	WPP
5370001	RA47 18 18	R1/8	G1/8	8.2	.323	17.0	.669	18.5	.728	35.5	1.398	10	16.7	.589	-40 ÷ 302	870
5370002	RA47 14 14	R1/4	G1/4	11.0	.433	21.5	.846	22.5	.886	44.0	1.732	12	31.2	1.101	-40 ÷ 302	870
5370003	RA47 38 38	R3/8	G3/8	12.0	.472	24.5	.965	25.5	1.004	50.0	1.969	15	53.8	1.898	-40 ÷ 302	870
5370004	RA47 12 12	R1/2	G1/2	14.0	.551	29.5	1.161	30.0	1.181	59.5	2.343	19	94.7	3.340	-40 ÷ 302	870